

Version : 0.1

TECHNICAL SPECIFICATION

MODEL NO. : PD057VT4

The content of this information is subject to be changed without notice.
Please contact PVI or its agent for further information.

Customer's Confirmation

Customer _____

Date _____

By _____

PVI's Confirmation

| Dep | FAE | Panel Design | Electronic Design | Mechanical Design | Product Verification | Prepared by |
|------|-----|--------------|-------------------|-------------------|----------------------|-------------|
| Sign | 劉豐強 | / | 楊文成 | 張國強 | / | 張國強 |

Revision History

| Rev. | Issued Date | Eng. | Revised | Contents |
|------|--------------|------|---------|-------------|
| 0.1 | Mar.18, 2008 | 吳昌霖 | | Preliminary |

TECHNICAL SPECIFICATION

CONTENTS

| NO. | ITEM | PAGE |
|------------|--|-------------|
| - | Cover | 1 |
| - | Revision History | 2 |
| - | Contents | 3 |
| 1 | Application | 4 |
| 2 | Features | 4 |
| 3 | Mechanical Specifications | 4 |
| 4 | Mechanical Drawing of TFT-LCD module | 5 |
| 5 | Input / Output Terminals | 6 |
| 6 | Touch Panel Characteristics | 8 |
| 7 | Absolute Maximum Ratings | 10 |
| 8 | Electrical Characteristics | 10 |
| 9 | Pixel Arrangement | 11 |
| 10 | Display Color and Gray Scale Reference | 12 |
| 11 | Interface Timing | 13 |
| 12 | Power On Sequence | 15 |
| 13 | Optical Characteristics | 15 |
| 14 | Handling Cautions | 19 |
| 15 | Reliability Test | 20 |
| 16 | Packing Diagram | 21 |

1. Application

This data sheet applies to a color TFT LCD module, PD057VT4.

PD057VT4 module applies to OA product, car TV (must use Analog to Digital driving board), which requires high quality flat panel display. If you must use in severe reliability environment, please don't extend over PVI's reliability test conditions.


2. Features

- . VGA (640*480 pixels) resolution
- . Module with resistive type touch panel
- . Amorphous silicon TFT LCD panel with back-light unit
- . Pixel in stripe configuration
- . Thin and light weight
- . Display Colors : 262,144 colors
- . TTL interface

3. Mechanical Specifications

| Parameter | Specifications | Unit |
|--------------------------------|-------------------------------------|------|
| Screen Size | 5.7 (diagonal) | inch |
| Display Format | 640×(R,G,B)×480 | dot |
| Display Colors | 262,144 | |
| Active Area | 115.20 (H)×86.4 (V) | mm |
| Pixel Pitch | 0.18(H)×0.18(V) | mm |
| Pixel Configuration | Stripe | |
| Outline Dimension | 144.0 (W)×104.6(H)×14.45 (D) (typ.) | mm |
| Weight | TBD | g |
| Back-light | 36-LED | |
| Surface treatment | Anti-glare + EWV film | |
| Display mode | Normally white | |
| Gray scale inversion direction | 6 o'clock [ref to Note 13-1] | |

4.Mechanical Drawing of TFT-LCD Module

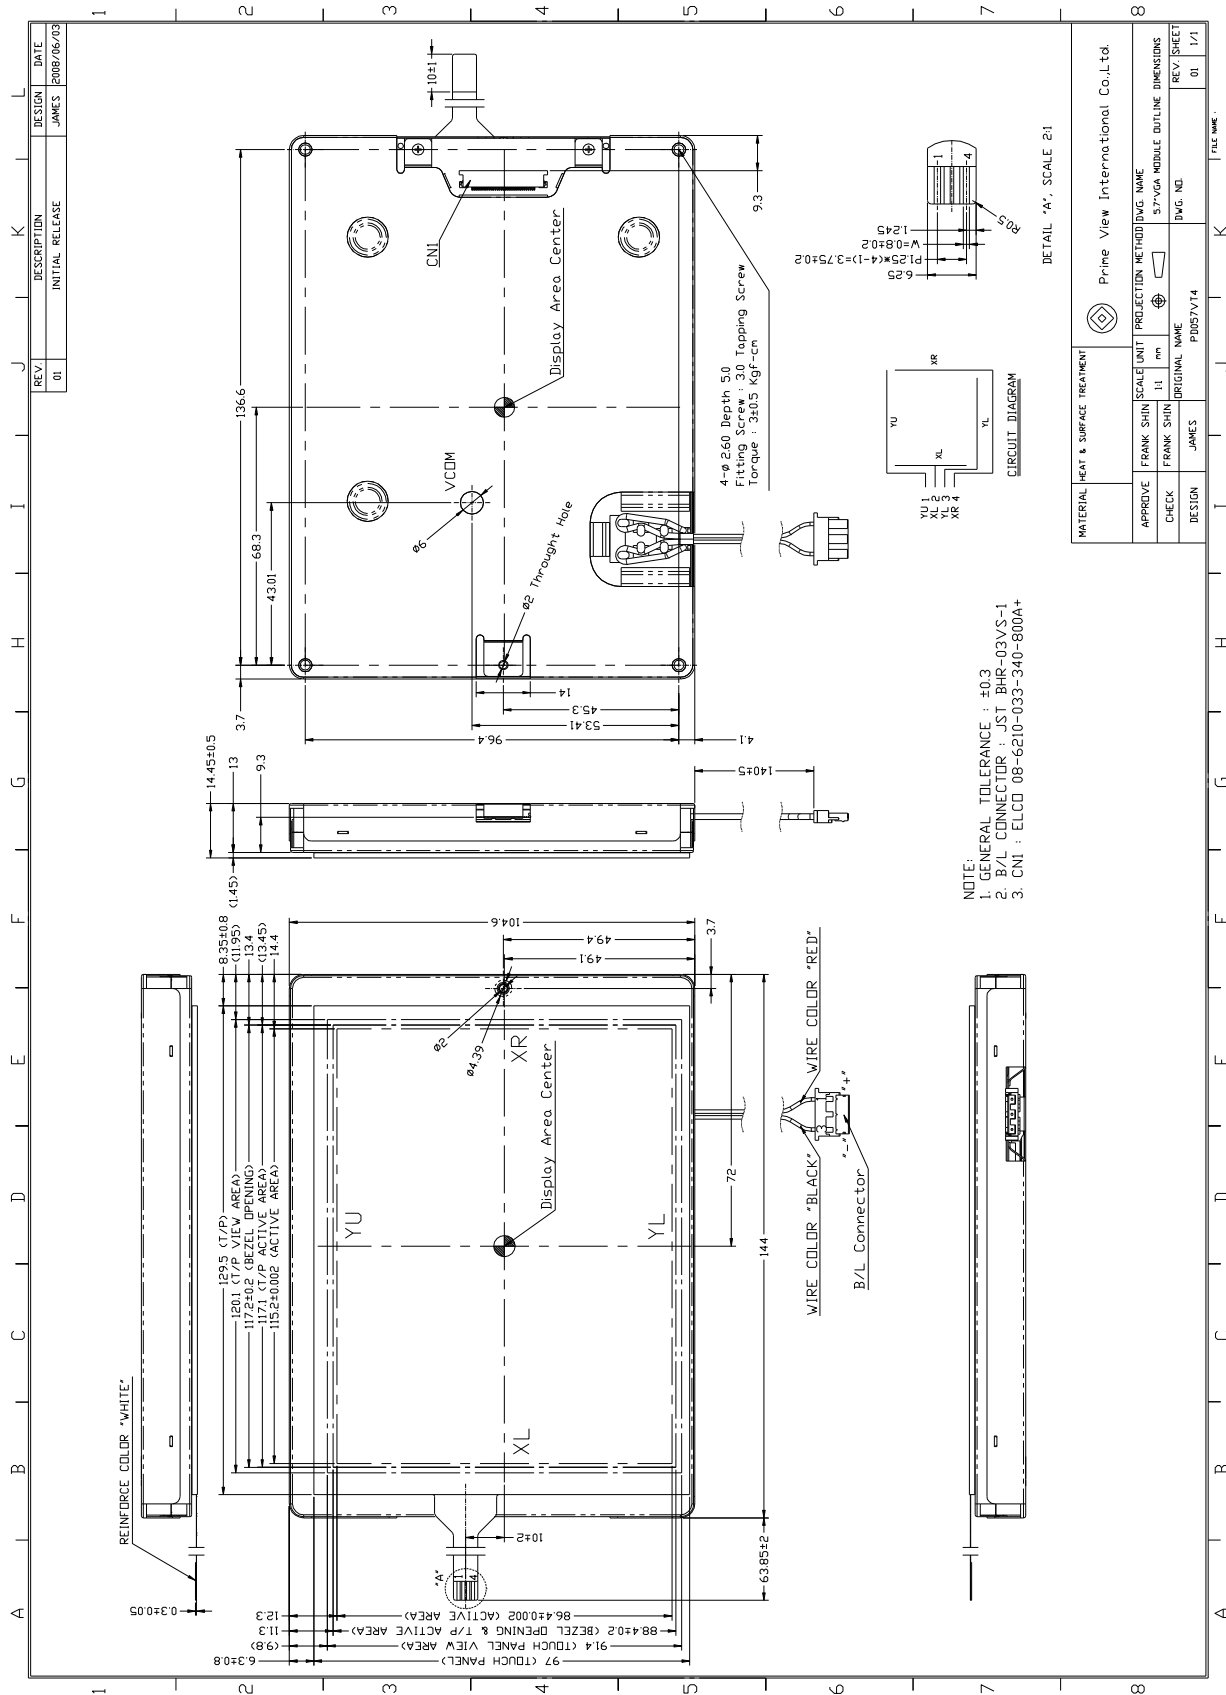

5. Input / Output Terminals


5-1) TFT-LCD Panel Driving

Connector type: ELCO 08-6210-033-340-800A+, PIN No 33 pins, pitch=0.5mm


| Pin No | Symbol | I/O | Description | Remark |
|--------|-----------------|-----|--|---------|
| 1 | GND | - | GND | |
| 2 | CK | I | Clock signal for sampling each data signal | |
| 3 | Hsync | I | Horizontal synchronous signal (negative) | |
| 4 | Vsync | I | Vertical synchronous signal (negative) | |
| 5 | GND | - | GND | |
| 6 | R0 | | RED data signal (LSB) | |
| 7 | R1 | I | RED data signal | |
| 8 | R2 | I | RED data signal | |
| 9 | R3 | I | RED data signal | |
| 10 | R4 | I | RED data signal | |
| 11 | R5 | I | RED data signal (MSB) | |
| 12 | GND | - | GND | |
| 13 | G0 | I | GREEN data signal (LSB) | |
| 14 | G1 | I | GREEN data signal | |
| 15 | G2 | I | GREEN data signal | |
| 16 | G3 | I | GREEN data signal | |
| 17 | G4 | I | GREEN data signal | |
| 18 | G5 | I | GREEN data signal (MSB) | |
| 19 | GND | - | GND | |
| 20 | B0 | I | Blue data signal (LSB) | |
| 21 | B1 | I | Blue data signal | |
| 22 | B2 | I | Blue data signal | |
| 23 | B3 | I | Blue data signal | |
| 24 | B4 | I | Blue data signal | |
| 25 | B5 | I | Blue data signal (MSB) | |
| 26 | GND | - | GND | |
| 27 | ENAB | I | Signal to settle the horizontal display position(positive) | Note5-1 |
| 28 | V _{CC} | - | +3.3V power supply | |
| 29 | V _{CC} | - | +3.3V power supply | |
| 30 | R/L | I | Horizontal display mode select signal L : Normal , H : Left /Right reverse mode | Note5-2 |
| 31 | U/D | I | Vertical display mode select signal H : Normal , L : Up/Down reverse mode | |
| 32 | V/Q | I | H : Normal | |
| 33 | GND | - | GND | |

Note5-1 : The horizontal display start timing is settled in accordance with rising of ENAB signal.
In case ENAB is fixed "Low", the horizontal start timing is determined as described in 10-2. Don't keep ENAB "High" during operation.

Note 5-2 : The definitions of U/D & R/L

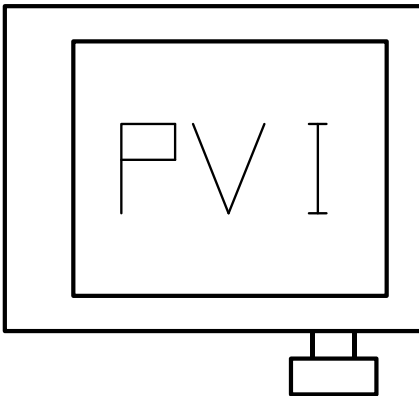

R/L(PIN 30)= Low, U/D(PIN 31)= High

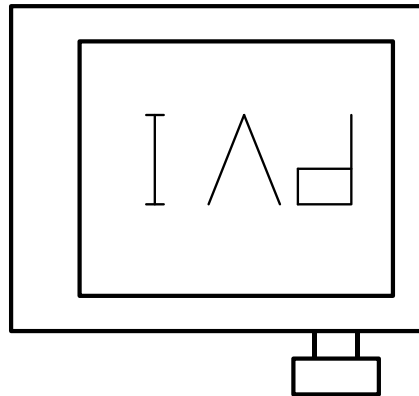

R/L(PIN 30)= High , U/D(PIN 31)= Low

5-2) LED Backlight driving

Connector type: JST BHR-03VS-1, PIN No 3 pins, pitch=8.0mm

| Pin No | Symbol | Description | Remark |
|--------|------------|---|--------|
| 1 | V_{High} | Power supply for lamp (High voltage side) | Red |
| - | NC | This is electrically opened | - |
| 3 | V_{Low} | Power supply for lamp (Low voltage side) | Black |

Note 5-4: Low voltage side of backlight inverter connects with ground of inverter circuits.

6.Touch Panel Characteristics

6-1) Pin assignment :

| Pin No. | Designation | Remark |
|---------|-------------|--------|
| 1 | YU (Bottom) | |
| 2 | XL (Top) | |
| 3 | YL (Bottom) | |
| 4 | XR (Top) | |

6-2) Electrical Performance :

| Parameters | Symbol | MIN. | Typ. | MAX. | Unit | Remark |
|----------------------------|----------------|------|------|-----------|------------|----------|
| Terminal Resistance | X | 400 | 550 | 810 | Ω | |
| | Y | 230 | 310 | 540 | Ω | |
| Input Voltage | V _T | - | 5 | 7 | V | |
| Linearity (X ,Y direction) | | - | - | ± 1.5 | % | |
| Insulation Impedance | | 20 | - | - | M Ω | DC 25V |
| Response Time | | - | - | 15 | ms | |
| Operation Force | | - | - | 50 | g | Note 6-1 |

Note 6-1 Input through R0.8mm stylus or R8.0mm finger.

6-3) Durability Performance

1. Hitting Durability:


At least 1,000,000 times with R8.0mm silicon rubber, 250g, 3 times/sec.

2. Sliding Durability:

At least 1,00,000 times with R0.8mm polyacetal stylus, 250g, 60 mm/sec.


6-4) Integration Design Guide

Avoid the design that Front-case overlap and press on the active area of the touch-panel.
 Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.

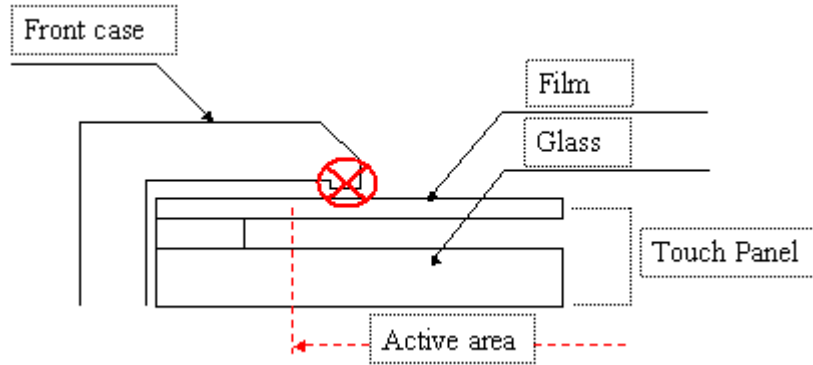

Use a buffer material (Gasket) between the touch-panel and front-case to protect damage and wrong operating.

Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

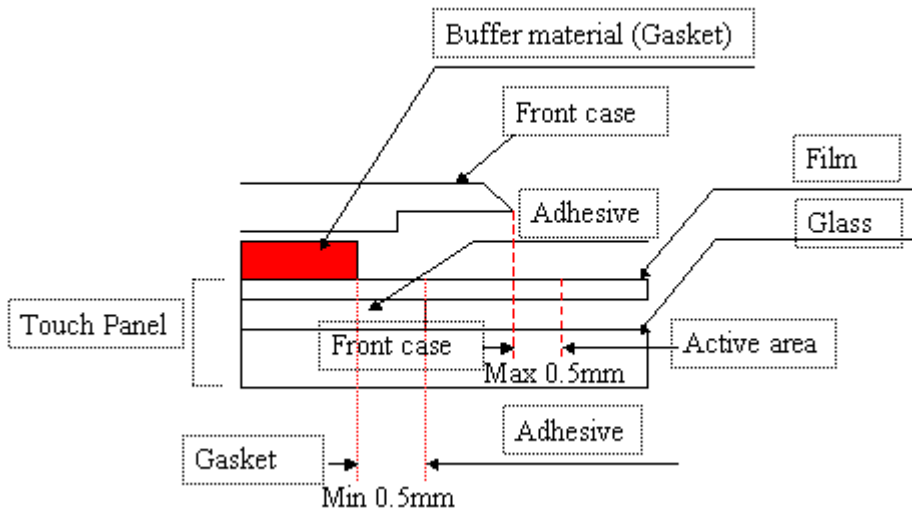

Note 6-2 We strongly suggest to follow above design guide to avoid the linear defect happened on the touch panel.

7. Absolute Maximum Ratings:

GND=0V, Ta=25°C

| Parameters | Symbol | Condition | MAX. | Unit | Remark |
|----------------------|-----------------|-----------|---------|------|---------|
| Input Voltage | V _I | Ta=25°C | -0.3~+4 | V | Note7-1 |
| +3.3V supply voltage | V _{CC} | Ta=25°C | 0~+3.6 | V | |

Note7-1:CK,R0~R5,G0~G5,B0~B5,Hsync,Vsync,ENAB,R/L,U/D,V/Q

8. Electrical Characteristics

8-1) Recommended Operating Conditions:

GND=0V, Ta=25°C

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|---------------------------------|-----------------|---------------------|------|---------------------|-------|-----------------------|
| +3.3V Supply Voltage | V _{CC} | +3.0 | +3.3 | +3.6 | V | |
| Permissive input ripple voltage | V _{RF} | - | - | 100 | mVp-p | V _{CC} =3.3V |
| Input voltage(Low) | V _{IL} | 0 | - | 0.3 V _{CC} | V | |
| Input voltage(High) | V _{IH} | 0.7 V _{CC} | - | V _{CC} | V | |


8-2) Recommended Driving Condition for LED Back Light

Ta=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Remark |
|------------------------------|------------------|------|------|------|------|-------------------------|
| LED voltage | V _{LED} | - | - | (11) | V | I _{LED} = 20mA |
| LED current | I _{LED} | - | 20 | - | mA | Note 7-1 |
| Back Light Power Consumption | P _{LED} | - | - | 2640 | mW | Note 7-2 |

Note 7-1 : The LED driving condition is defined for each LED module. (3 LED Serial)

Note 7-2 : $P_{LED} = V_{LED-1} * I_{LED-1} + V_{LED-2} * I_{LED-2} \dots + V_{LED-11} * I_{LED-11} + V_{LED-12} * I_{LED-12}$

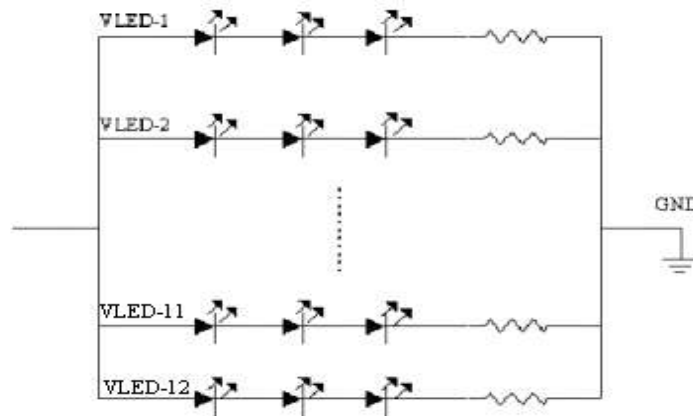


8-3) Power Consumption

| Parameters | Symbol | Typ. | Max. | Unit | Remark |
|-----------------------------|----------|------|------|------|----------|
| +3.3V Current Dissipation | I_{CC} | 67 | 100 | mA | |
| LCD Panel Power Consumption | - | 0.22 | 0.33 | W | Note 8-4 |

Note 8-4: The power consumption for back light is not included.

9. Pixel Arrangement

The LCD module pixel arrangement is stripe configuration.

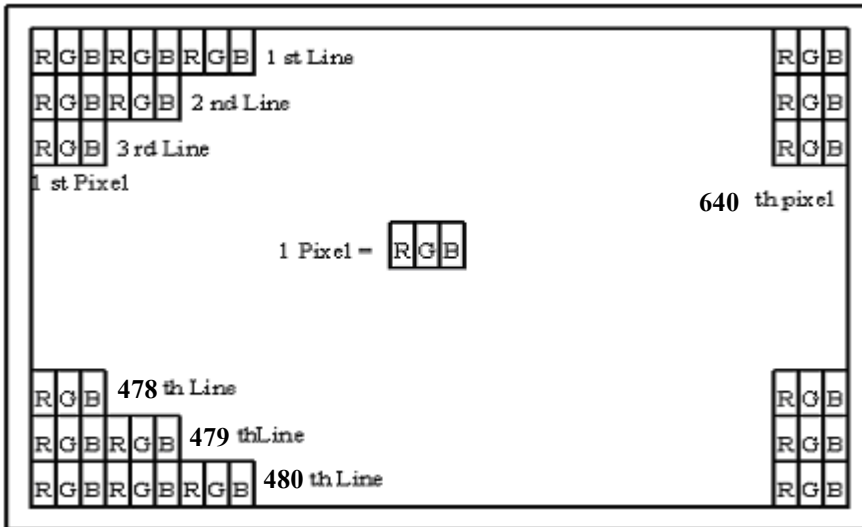

10. Display Color and Gray Scale Reference

| Color | | Input Color Data | | | | | | | | | | | | | | | | | |
|--------------|------------|------------------|----|----|----|----|----|-------|----|----|----|----|----|------|----|----|----|----|----|
| | | Red | | | | | | Green | | | | | | Blue | | | | | |
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue (63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Red | Red (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (01) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (02) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Red (61) | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (62) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green | Green (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (02) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Green (61) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (62) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| Blue | Blue (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue (02) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Blue (61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| | Blue (62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| | Blue (63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

11. Interface Timing

11-1) Timing Parameters

| | Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---------------------------|-------------|------------------|-------|-------|------|-------|
| Clock | Frequency | 1/Tcph | --- | 25.2 | 27.8 | MHz |
| | "High" time | Tcwh | 18 | --- | --- | ns |
| | "Low" time | Tcwl | 18 | --- | --- | ns |
| Data | Setup time | Tdsu | 10 | --- | --- | ns |
| | Hold time | Tdhd | 10 | --- | --- | ns |
| Hsync | Period | TH | 30.00 | 31.78 | --- | us |
| | | | 770 | 800 | 900 | clock |
| | Pulse width | TH _{WH} | 5 | 30 | --- | clock |
| Vsync | Period | TV | 515 | 525 | 560 | line |
| | Pulse width | T _{WV} | 1 | 3 | 5 | line |
| Horizontal display period | | THd | 640 | 640 | 640 | clock |
| Vertical display period | | TVd | 480 | 480 | 480 | line |

Note 11-1 : In case of low-frequency, the deterioration of display quality, flicker etc., may occur.

11-2) Display Position in horizontal direction

Display position in horizontal direction is designated by rising timing of ENAB signal.

| | Parameter | Symbol | Min. | Typ. | Max. | Unit | Note |
|--|-------------|--------|------|------|------|-------|------|
| ENAB signal | Setup time | Tesu | 10 | --- | --- | ns | |
| | Pulse width | Tep | 2 | 640 | 640 | clock | |
| Phase difference between Hsync and ENAB signal | | THs | 112 | 144 | 175 | clock | |


When ENAB is fixed to "Low", the horizontal display will start from 144th clock after HS falling.

11-3) Display Position in vertical direction


Display start position in vertical direction is fixed to the 35th line.

The ENAB signal does not relate to Vertical display position.

11-4) Timing Diagram

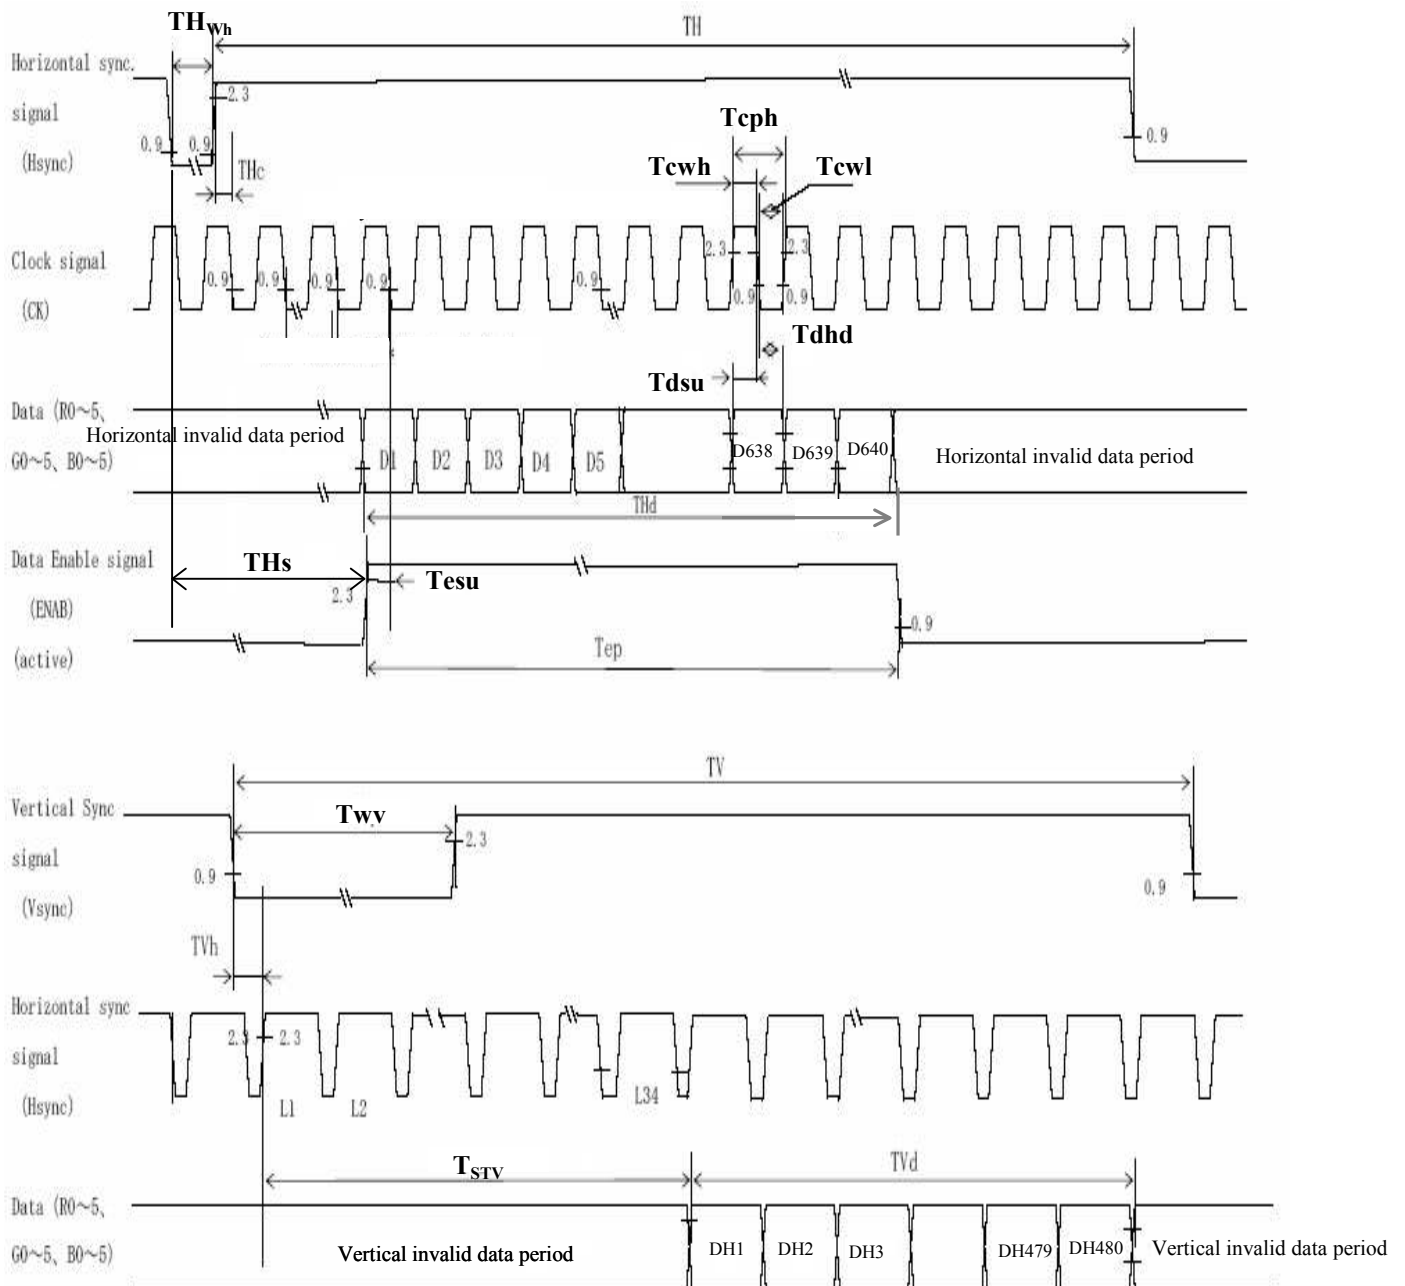

12. Power On Sequence

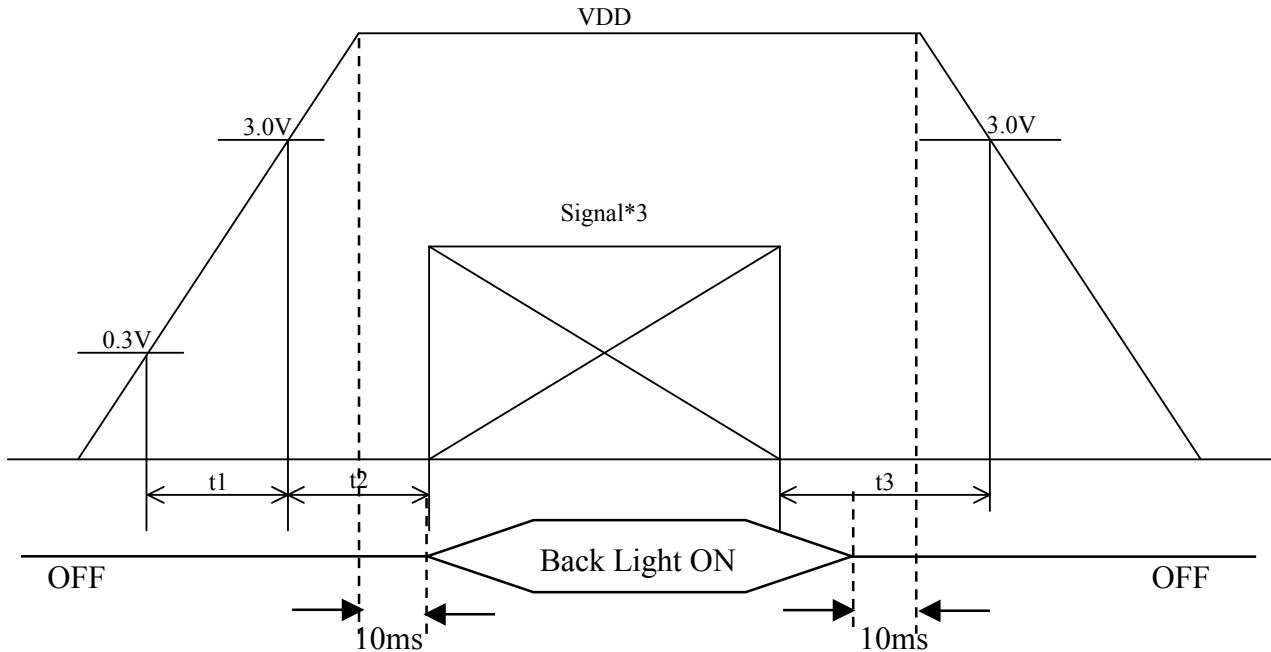

1. $0 < t1 \leq 20\text{ms}$
2. $0 < t2 \leq 50\text{ms}$
3. $0 < t3 \leq 1\text{s}$


13. Optical Characteristics

13-1) Specification:

 $T_a = 25^\circ\text{C}$


| Parameter | | Symbol | Condition | MIN. | TYP. | MAX. | Unit | Remarks |
|----------------------|------------|--------------------------|----------------------------------|-------|-------|------|------------------------|-----------|
| Viewing Angle | Horizontal | θ | $CR \geq 10$ | (75) | (80) | - | deg | Note 13-1 |
| | Vertical | θ (to 6 o'clock) | | (65) | (70) | - | deg | |
| | | θ (to 12 o'clock) | | (45) | (50) | - | deg | |
| Contrast Ratio | | CR | At optimized viewing angle | (400) | (600) | - | - | Note 13-2 |
| Response time | Rise | T_r | $\theta = 0^\circ$ | - | 15 | 30 | ms | Note 13-3 |
| | Fall | T_f | | - | 25 | 50 | ms | |
| Brightness | | - | $\theta = 0^\circ / \varphi = 0$ | (450) | (500) | - | cd/m^2 | Note 13-4 |
| Luminance Uniformity | | U% | | 80 | 85 | - | % | Note 13-5 |
| Cross Talk | | - | $\theta = 0^\circ$ | - | - | 3.5 | % | Note 13-7 |
| White Chromaticity | | x | | 0.26 | 0.30 | 0.34 | - | |
| | | y | | 0.29 | 0.33 | 0.37 | - | |
| Lamp Life Time | | - | | 20000 | - | - | hr | Note 13-6 |

Note 13-1: The definitions of viewing angles are as follow

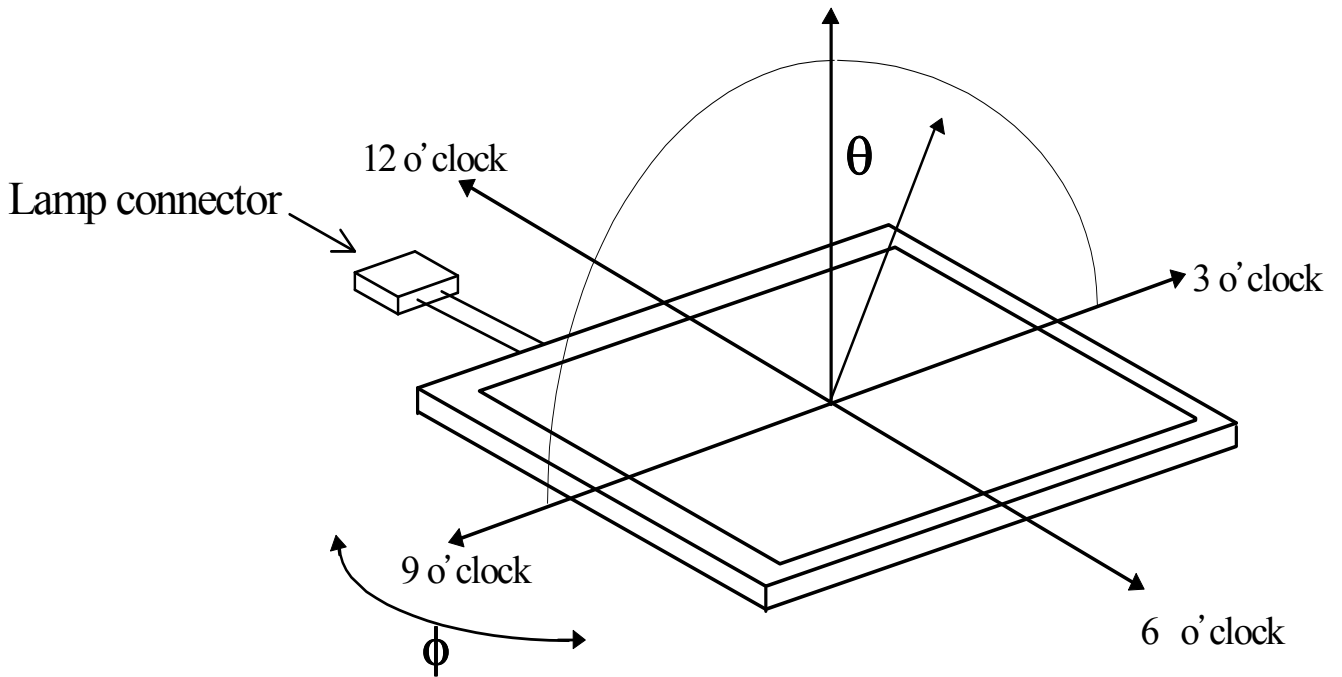


Note 13-2: The definition of contrast ratio $CR = \frac{\text{Luminance at gray level 63}}{\text{Luminance at gray level 0}}$

Note 13-3: Definition of Response Time T_r and T_f :

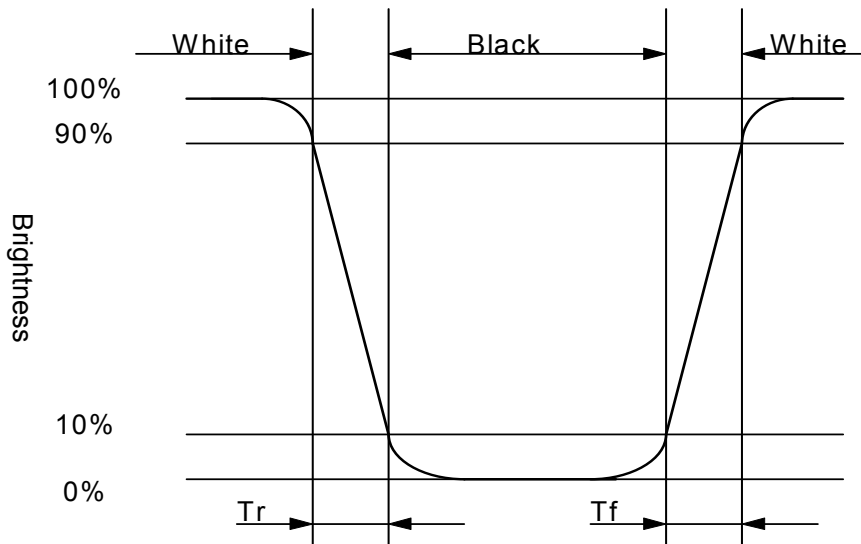

Note 13-4: All optical measurements shall be performed after backlight being turned-on for 30 mins. The optical characteristics shall be measured in dark room (ambient illumination on panel surface less than 1 Lux). The measuring configuration shows as following figure.

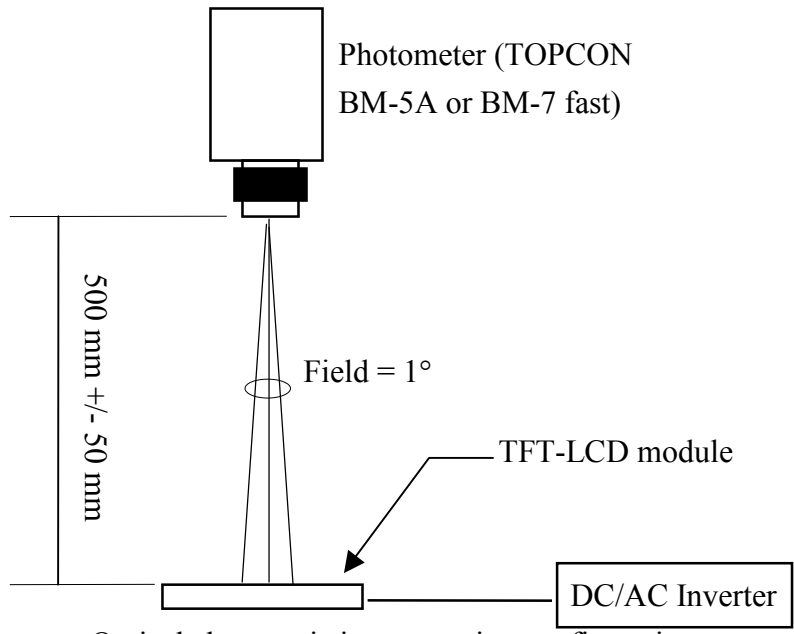

Optical characteristics measuring configuration

Note 13-5: The uniformity of LCD is defined as

$$U = \frac{\text{The Minimum Brightness of the 9 testing Points}}{\text{The Maximum Brightness of the 9 testing Points}}$$


Luminance meter: BM-5A or BM-7 fast (TOPCON)

Measurement distance: 500 mm +/- 50 mm

Ambient illumination: < 1 Lux

Measuring direction: Perpendicular to the surface of module

The test pattern is white (Gray Level 63).

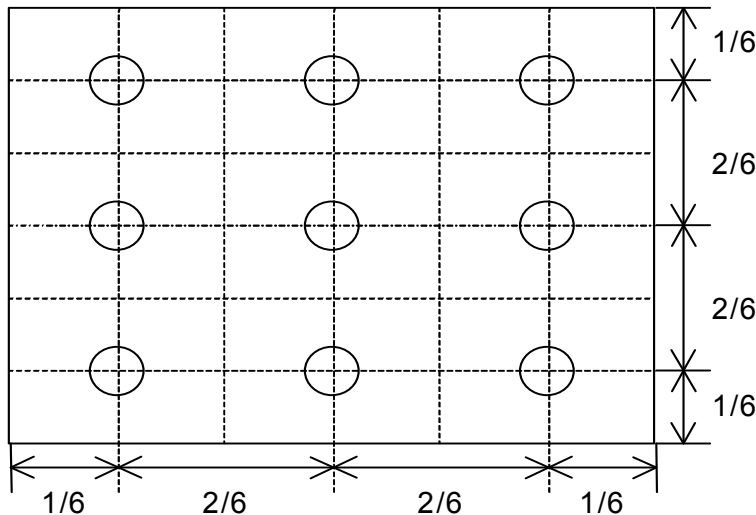

Note 13-6: The “LED Life time “ is defined as the module brightness decrease to 50% original Brightness that the ambient temperature is 25°C and I_{LED} = 20mA.

Note 13-7: Cross Talk (CTK) = $\frac{|YA-YB|}{YA} \times 100\%$

YA: Brightness of Pattern A

YB: Brightness of Pattern B


Luminance meter : BM 5A or BM-7 fast (TOPCON)

Measurement distance : 500 mm +/- 50 mm


Ambient illumination : < 1 Lux

Measuring direction : Perpendicular to the surface of module

Pattern A
(Gray Level 31)

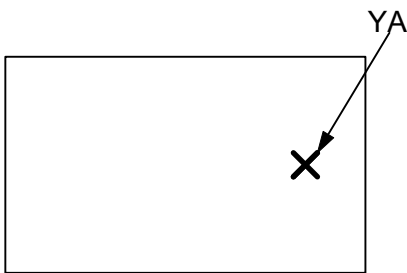

Pattern B
(Gray Level 31, central black box exclusive)

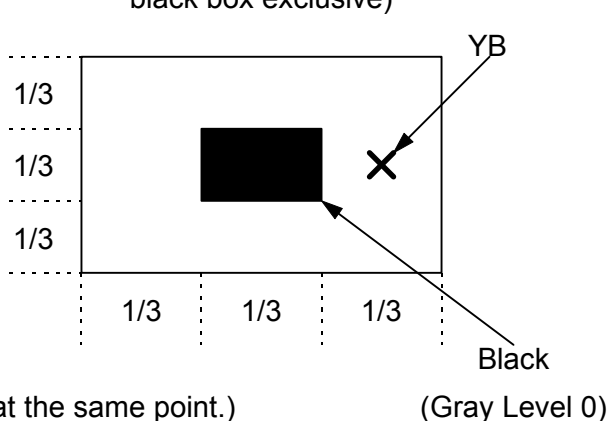

X: Measuring Point (A and B are at the same point.)

(Gray Level 0)

14. Handling Cautions

14-1) Mounting of module

- a) Please power off the module when you connect the input/output connector.
- b) Please connect the ground pattern of the inverter circuit surely. If the connection is not perfect, some following problems may happen possibly.
 - 1. The noise from the backlight unit will increase.
 - 2. The output from inverter circuit will be unstable.
 - 3. In some cases a part of module will heat.
- c) Polarizer which is made of soft material and susceptible to flaw must be handled carefully.
- d) Protective film (Laminator) is applied on surface to protect it against scratches and dirt. It is recommended to peel off the laminator before use and taking care of static electricity.

14-2) Precautions in mounting

- a) When metal part of the TFT-LCD module (shielding lid and rear case) is soiled, wipe it with soft dry cloth.
- b) Wipe off water drops or finger grease immediately. Long contact with water may cause discoloration or spots.
- c) TFT-LCD module uses glass which breaks or cracks easily if dropped or bumped on hard surface. Please handle with care.
- d) Since CMOS LSI is used in the module. So take care of static electricity and earth yourself when handling.

14-3) Adjusting module

- a) Adjusting volumes on the rear face of the module have been set optimally before shipment.
- b) Therefore, do not change any adjusted values. If adjusted values are changed, the specifications described may not be satisfied.

14-4) Others

- a) Do not expose the module to direct sunlight or intensive ultraviolet rays for many hours.
- b) Store the module at a room temperature place.
- c) The voltage of beginning electric discharge may over the normal voltage because of leakage current from approach conductor by to draw lump read lead line around.
- d) If LCD panel breaks, it is possibly that the liquid crystal escapes from the panel. Avoid putting it into eyes or mouth. When liquid crystal sticks on hands, clothes or feet. Wash it out immediately with soap.
- e) Observe all other precautionary requirements in handling general electronic components.
- f) Please adjust the voltage of common electrode as material of attachment by 1 module.

14-5) Polarizer mark

The polarizer mark is to describe the direction of wide view angle film how to match up with the rubbing direction.

15. Reliability Test

| No | Test Item | Test Condition | Remark |
|----|---|--|--------|
| 1 | High Temperature Storage Test | Ta = +80°C, 240 hrs | |
| 2 | Low Temperature Storage Test | Ta = -40°C, 240 hrs | |
| 3 | High Temperature Operation Test | Ta = +70°C, 240 hrs | |
| 4 | Low Temperature Operation Test | Ta = -30°C, 240 hrs | |
| 5 | High Temperature & High Humidity Operation Test | Ta = +60°C, 90%RH, 240 hrs (No Condensation) | |
| 6 | Thermal Cycling Test (non-operating) | -20°C → +70°C, 200 Cycles 30 min 30 min | |
| 7 | Vibration Test (non-operating) | Frequency: 10 ~ 57 Hz / Vibration Width: 0.075mm 58-500 Hz / Gravity: 9.8m/s ² Sweep time: 11 minutes Test period: 3 hrs for each direction of X, Y, Z | |
| 8 | Shock Test (non-operating) | Gravity: 490m/s ² * 6ms Direction: ±X, ±Y, ±Z 3 times for each direction | |
| 9 | Electrostatic Discharge Test (non-operating) | 150pF · 330Ω Air : ±15KV ; Contact : ±8KV 10 times/point · 9 points/panel face | |

Ta: ambient temperature

Note: The protective film must be removed before temperature test

[Criteria]

In the standard conditions, there is not display function NG issue occurred.
(Including : line defect, no image) All the cosmetic specification is judged before the reliability stress.

16. Packing Diagram

