


Model:	4LP1067220N-3		
Battery pack specification 电池组规格	Min.Capacity 最低容量(mAh) (0.2C, 23±2°C)	34500	
	*Combination of battery capacity (组合电芯容量)		
	Typical Capacity 典型容量(mAh) (0.2C, 23±2°C)	36000	
	*Combination of battery capacity (组合电芯容量)		
Nominal Voltage 标称电压(V)	14.8		
Internal impedance 内阻(≦) (mΩ, AC 1KHZ)	150		
Ambient Conditions 环境温度	Charge Temp. 充电温度(°C)	0~45	
	Discharge Temp. 放电温度(°C)	-10~60	
	Humidity(湿度)	65±20%	

Overcharge Detection Voltage(V) 过充保护电压(V)	4.35±0.05	
Overdischarge Detection Voltage(V) 过放保护电压(V)	2.4±0.1	
Limited to Max loading current 仅用于最大的负载电流	constant (A)	
peak value (A)	5	2.5
峰值 (A)	5	2.5
Customer required Max loading current 客户要求最大的负载电流	constant (A)	
peak value (A)	5	2.5
峰值 (A)	5	2.5

Battery protection Related Value:
(相关的电池保护值)

If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design.
(如果实际应用的负载电流大于EEMB提供值, 请提出来. 实际的应用情况对PCM的设计至关重要)

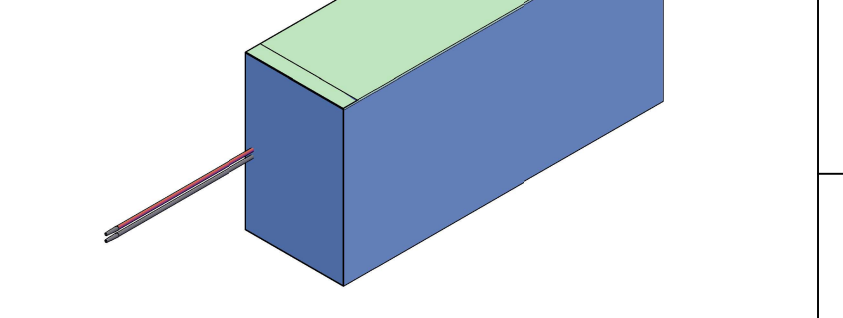

Remark(备注):

- No scratch, distortion, discoloration and leakage on the appearance of the cell (电池表面无划痕、变形、污点及漏液等现象).
- Rohs compliant (严格按照ROHS要求生产).

EEMB® EEMB BATTERY	Drawn:	Summer	Revise No.:	E4-2009	
	Group:	Group19	Projection:		
Title	4LP1067220N-3-PCM-LD	Approved2:	Page:	1/1	
File NO.	A20802	Draw Date:	2020/10/14	Unit:	mm