

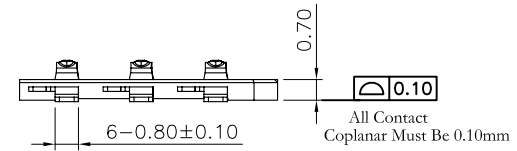


Recommended PCB Layout

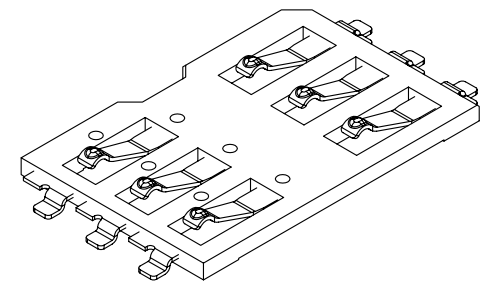

DETAIL-A
SCALE 4:1

9002- L 06 G xx N T
 Series Style Position G: Gold Plated C: Selective Gold Plated
 T: Tape & Reel Package
 N: Without Post
 00: G/F
 10: 10u"
 15: 15u"
 30: 30u"

REV.	SPECIFICATION	ECN NO.	APPD.
A1	NEW ISSUE		



Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 500MΩmin. at DC 500V.
Contact Resistance: 100mΩmax. at DC 10mA.
Operating Temperature: -40°C~+85°C.

*** RoHS Compliant.**

Tolerances	Drawn No.	9002-D0000-004		Title: 9002 Series SIM Card Connector SMD	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.				
x = ±0.5	Projection				P/N: 9002-L06GxxNT				
.x = ±0.25	Unit	mm	Scale		1:1	SHEET	1/1	Ver. No.	A1
.xx = ±0.15	Drawn By	FHY03/25'08							