


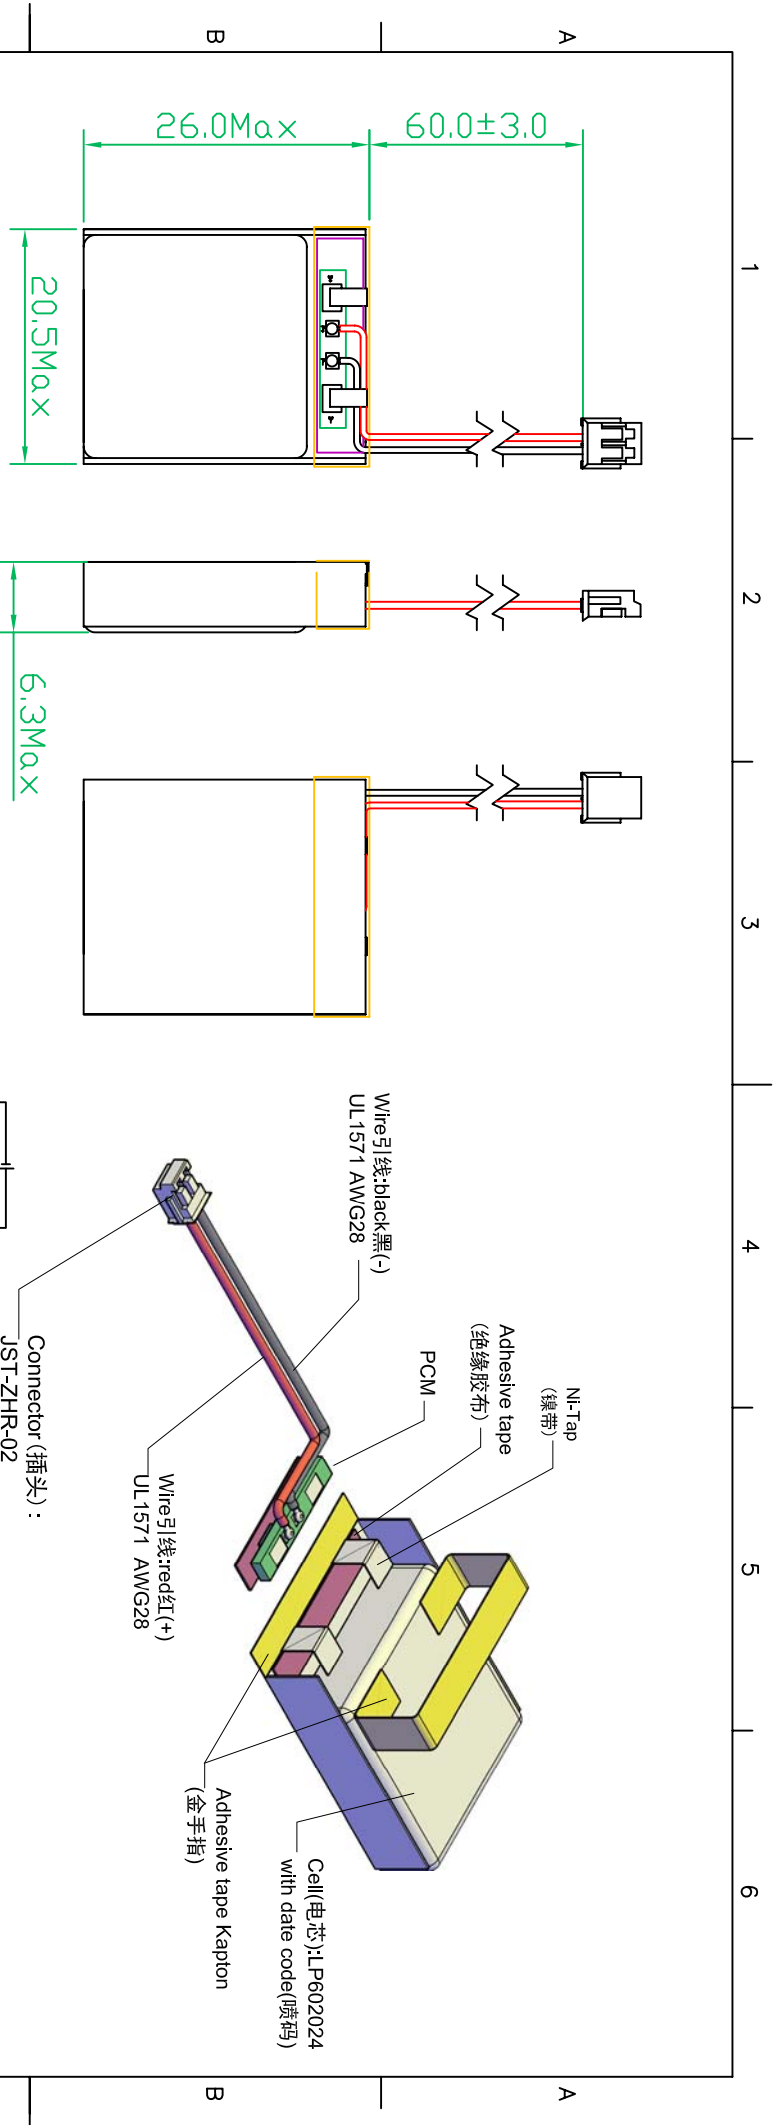

Model: LP602024		Min.Capacity 最低容量 (mAh) (0.2C,25±3°C) ■Single cell capacity (单体电芯容量)	200	Overcharge Detection Voltage(V) 过充保护电压 (V)	4.28±0.05
Battery pack specification (电池组规格)		Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) ■Single cell capacity (单体电芯容量)	210	Overdischarge Detection Voltage(V) 过放保护电压 (V)	3.0±0.1
		Nominal Voltage 标称电压 (V)	3.7	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 1 (A)	constant (A) 持续 0.25 (A)
		Internal impedance 内阻 (≤) (mΩ,AC 1KHz)	350	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 (A)	
		Charge Temp. 充电温度 (°C)	0~45	Battery protection Related Value: (相关的电池保护值)	
		Discharge Temp. 放电温度 (°C)	-20~60	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
Ambient Conditions (环境温度)		Humidity(湿度)	65±20%		

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. Rohs compliant(严格按照ROHS要求生产).

Title		EEMB BATTERY		Drawn:	Hexin	Revise No.:	E4-2009
File NO.		LP602024-PCM-LD/ A10389		Checked 1:	Cathy	Projection:	1:1
				Checked 2:		Page:	1/1
				Approved:		Scale:	1:1
				Draw Date:	2014/10/21	Unit:	mm