

DATENBLATT

I-PEX adapter set for LVDS applications | 40 pin
ADA-I-PEX-20455-40-SET-0250LI



BESCHREIBUNG

The adapter set ADA-I-PEX-20455-40-SET-0250LI is especially designed for high speed LVDS applications/LCD display control.

An adaption between the display cable and a conventional cable is easily feasible.

The adapter set includes:

-
- 1 x ADA-I-PEX-20455-40
 - 1 x KAB-I-PEX-20453-040T-0050-1:1 FLAT
 - 1 x KAB-SHDR-40V-0-250LI
-

ADA-I-PEX-20455-40

-
- adapter board for transformation of I-PEX micro coaxial cable 20453-040 into conventional cables
 - side 1: I-PEX 20455-40, R = 0.50 mm
 - side 2: SHDR-40 or ACES-87219-4000
 - dimension: 29 mm x 24 mm
-

KAB-I-PEX-20453-040T-0050-1:1-FLAT

-
- side 1: I-PEX 20453-040T, R = 0.50 mm
 - side 2: I-PEX 20453-040T, R = 0.50 mm
-

- AWG40 conduction, Micro-Coax, configuration 1:1, L = 50 mm

KAB-SHDR-40V-0-250LI

- side 1: SHDR-40 or 87219-4000
- side 2: unprocessed
- 40 x single strands, multi color, AWG28, UL 1571
- L = 250 mm (unplugged)

The single components of a set may also be supplied separately. Further customized solutions upon request. Please let us know your requirements. We would be glad to submit you our individual quotation.

Are you looking for accessories for your I-PEX connector of the CABLINE®-VS series? Do you want to fix and lock your connector on your PCB or your board? How about a **Pull Bar** (I-Pex part number: 2576)?


Matching pin headers: F62240-H1210A, MSAK24025P40G

Matching displays: G101EVN01.0, B133EW03-V1, B101AW01 V1, B125XW01-V0, B156HW01-V3, TVL-55682D101U-LW-I-AAN, B173RW01_V3, B173RW01, B156HW01 V3, N156HGE-L11_V3.0, DLF1095?ENN?A01, UMOH-9113MD-T_V0, T101UB01D02, T101VB01D01, G101EVN03.1, G101EVN01.5, G101STN01.0, G101STN01.2, G101STN01.4, G101STN01.6, G156HCK-L01, M101NWWB-R3, TX34D200VM0BAA, NL192108AC21-01, TM101JDHG38, PT1280101E-ILMFW-EMC04, MTD1010CZK, MCT101E0W1280800LMLIPS, CH101CLHL-001, LMT101DNLFDW, NV184QUM-N21, G101EAN02.2, G170HAN01.0, AM-1280800WJTZQW

Matching eDP™ displays: B116XAN04.1 HW0A, N173DSE-G31

Matching connectors: Starconn 300E40-0010RA-G3

FOTOS

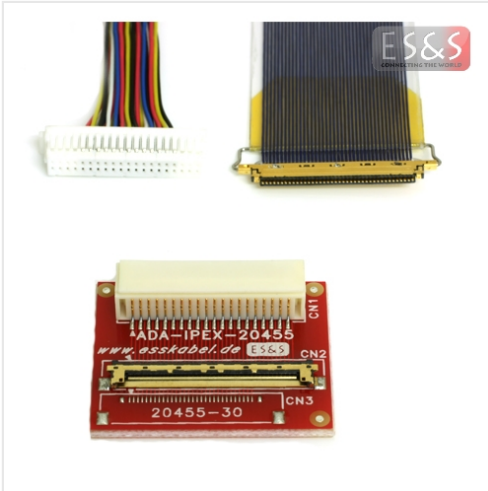

DISCLAIMER

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support