

AMED30-NZ

Click to
ORDER
samples

Picture coming soon

DIN Rail


The AMED30-NZ is whole new DIN rail bracket AC-DC converter featuring a cost effective, energy efficient solution. The products offer a high level of stability and immunity to noise, compliant with international IEC/EN/UL62368 and EN61558 standards. These lightweight AC-DC converters also have an extremely compact design for space saving and are ideal for applications such as industrial control equipment machinery and numerous applications for harsh environments.

This new series offers great operating temperatures, from -40°C to 70°C and an isolation of 4000VAC for improved reliability and system safety. Furthermore, a high MTBF of 300,000h, output short circuit protection (OSCP), output over-current protection (OCP) and an output over-voltage protection (OVP) come standard with the series.

Features

- Universal Input: 85 - 264VAC/120 - 370VDC
- Operating Temp: -40 °C to +70 °C
- High isolation voltage: 4000VAC
- Low ripple & noise, 240mV(p-p), max.
- Output short circuit, over-current, over-voltage protection

Summary

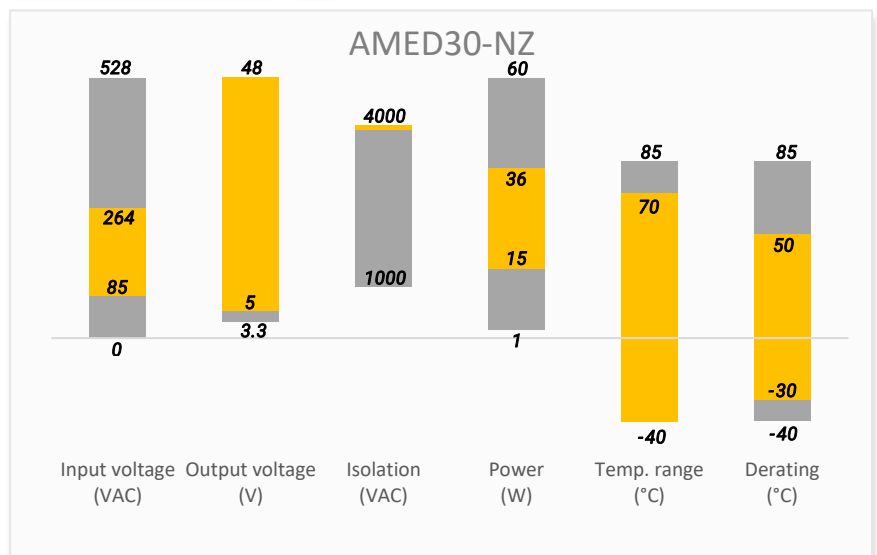

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications

Single Output							
Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (mA)	Maximum capacitive load (μF)	Efficiency @ 230VAC Typ. (%)
AMED30-5SNZ	85~264/47~63	120~370	15	5	3000	12000	82
AMED30-12SNZ	85~264/47~63	120~370	24	12	2000	6000	88
AMED30-15SNZ	85~264/47~63	120~370	30	15	2000	5000	89
AMED30-24SNZ	85~264/47~63	120~370	36	24	1500	1400	89
AMED30-48SNZ	85~264/47~63	120~370	36	48	750	600	90

Input Specifications				
Parameters	Conditions	Typical	Maximum	Units
Input Current	115VAC		900	mA
	230VAC		500	
Inrush Current	115VAC	25		A
	230VAC	45		
Leakage Current	264VAC		0.25	mA RMS

Output Specifications				
Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	0 - 100% load	± 2		%
Line regulation	Rated load	± 0.5		%
Load regulation	230VAC	± 1.5		%
Ripple & Noise	20MHz bandwidth	5 VDC Output	80	mV p-p
		12 VDC Output	120	
		15 VDC Output	120	
		24 VDC Output	150	
		48 VDC Output	240	
Hold up time	115VAC	12		ms
	230VAC	60		
Start up time			3	S
No load power consumption	230VAC	48 VDC Output	0.4	W
		others	0.3	
Voltage adjustable range	50% load	5 VDC Output	4.9 - 5.5	V
		12 VDC Output	10.8 - 13.8	
		15 VDC Output	13.5 - 18.0	
		24 VDC Output	21.6 - 29.0	
		48 VDC Output	43.2 - 55.2	

Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, Leakage current < 5mA	4000		VAC



General Specifications

Parameters	Conditions		Typical	Maximum	Units
Over Current protection	Self- recovery		≥ 120		% of Iout
Over voltage protection	Voltage clamp or hiccup	5 VDC Output	≤ 7.5		VDC
		12 VDC Output	≤ 16		
		15 VDC Output	≤ 20		
		24 VDC Output	≤ 36		
		48 VDC Output	≤ 60		
Short circuit protection	Hiccup, Continuous, Self-recovery				
Switching Frequency			65		KHz
Operating temperature			-40 to +70		°C
Storage temperature			-40 to +85		°C
Operating altitude				2000	m
Power derating	-40 °C to -30°C	5 / 48 VDC Output	3.0		% / °C
		12 / 15 VDC Output	7.0		
		24 VDC Output	5.0		
	50 °C to 70 °C		2.5		% / VAC
	85 to 100 VAC		1		
Temperature coefficient			± 0.02		% / °C
Protection Class	Class II				
Cooling	Free air convection				
Storage Humidity				95	% RH
Case material	Heat resistant black Plastic (flammability to UL 94V-0)				
Weight			115		g
Dimensions (L x W x H)	3.45 x 1.38 x 2.28 inches (92.66 x 35.00 x 58.00 mm)				
MTBF	> 300 000 hrs (MIL-HDBK -217F, t=+25°C)				
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.					


Safety Specifications

Parameters		
Standards	Designed to meet IEC/EN/UL 62368, EN61558	
	EMC - Conducted and radiated emission	CISPR32 / EN55032, Class B
	Electrostatic Discharge Immunity	IEC 61000-4-2 Contact ±6KV, Air ±8KV, Criteria A
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 10V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 ±2KV, Criteria A
	Surge Immunity	IEC 61000-4-5 L-L ±2KV, Criteria A
	CS, Conducted Disturbance Immunity	IEC 61000-4-6 10V r.m.s, Criteria A
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11 0%, 70%, Criteria A

Derating

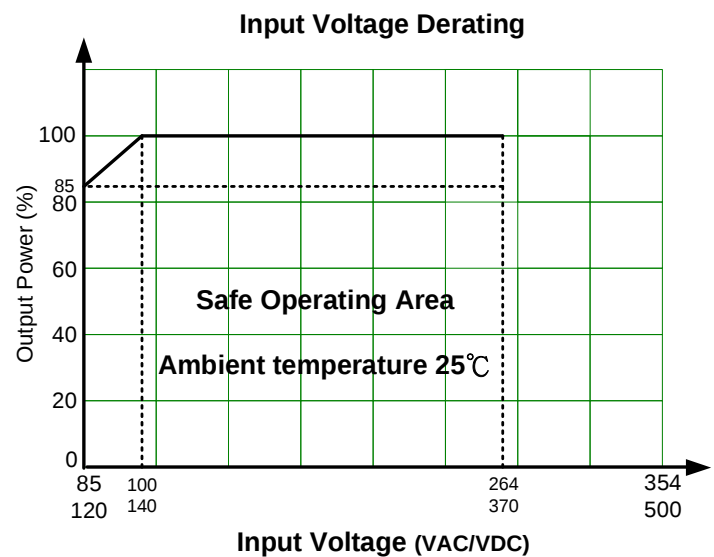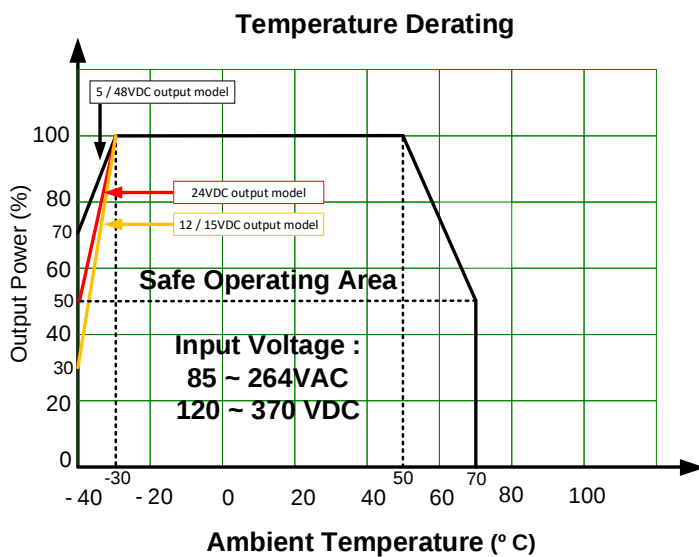

Dimensions

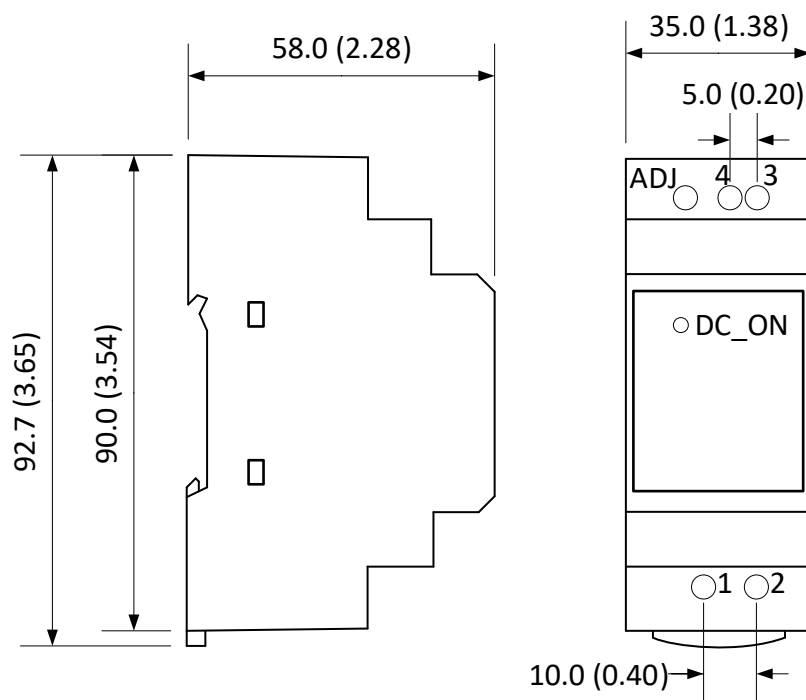

Pin Output Specifications	
Pin	Function
1	Input (N)
2	Input (L)
3	-V Output
4	+V Output
ADJ	Voltage adjustment

Note:

Unit: mm (inch)

General tolerance: ± 1.0 (0.04)

Wire gauge: 24 – 12AWG

Tightening torque: 0.4N·m Max.

Mounting rail: TS35

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.