
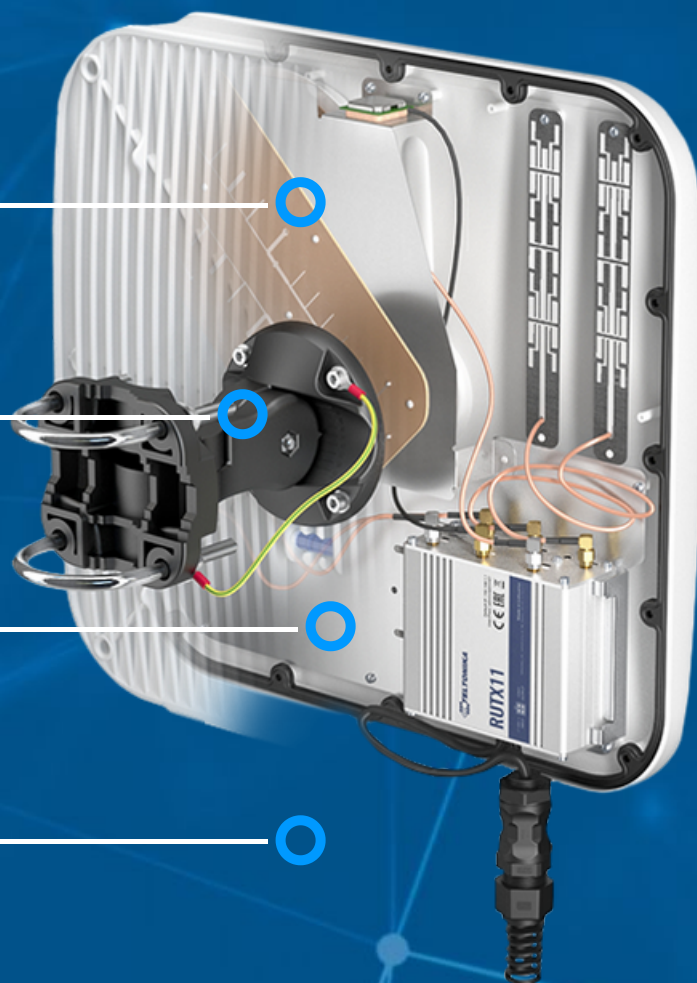


QuMax XR All In

Integrated outdoor multi band eXtra Range LTE directional antenna + Wi-Fi dual band 2.4 & 5 GHz omni antenna + Bluetooth antenna + GPS antenna + place to install Teltonika RUT200/240/241/900/901/950/951/955/956/X09/X11 (All-in-one)

QuMAX eXtra Range All In offers the most powerful directional LTE antenna of all QuWireless antennas. It is dedicated to connections with long distance to base station. It also has embedded Wi-Fi dual band 2.4 & 5 GHz omni antennas, GPS antenna and Bluetooth antenna. It is designed to have Teltonika RUT200/240/241/900/901/950/951/955/956/X09/X11 router installed inside IP67 enclosure. It is the first choice for fixed installations in industrial environment.



UNIVERSAL MOUNTING BRACKET



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
GAIN	694 - 960 MHz : 7 dBi 1.7 - 2.2 GHz : 7 dBi 2.2 - 2.7 GHz : 7 dBi
FRONT-TO-BACK	>10 dB
VSWR	<1.70, max <2.00
BEAMWIDTH	70°/70° ±15°
POLARIZATION	Dual polarized X-Pol
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6 GHz : 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

BLUETOOTH ANTENNA SPECIFICATION

FREQUENCY	2.30 - 2.60 GHz
GAIN	3 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	392 x 392 x 99 mm 15.43 x 15.43 x 3.90 inch
WEIGHT	3.7 kg 8.16 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm
MAST DIAMETER	25-66mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G GSM

	5	6	8	12	13	14	17	
617 MHz	18	19	20	26	27	28	29	960 MHz
	44	67	68	85	n81	n82	n83	
	n89							

LTE / 4G UMTS

	1	2	3	4	9	10	25	
1710 MHz	33	34	35	36	37	39	59	2170 MHz
	62	n80	n84	n86	n95			

LTE / 4G WCS DARS


2300 MHz	30	40						2400 MHz
----------	----	----	--	--	--	--	--	----------

LTE / 4G


2400 MHz	7	38	41	53	69	n90		2700 MHz
----------	---	----	----	----	----	-----	--	----------

PLOTS


VSWR for LTE antenna PORT 1

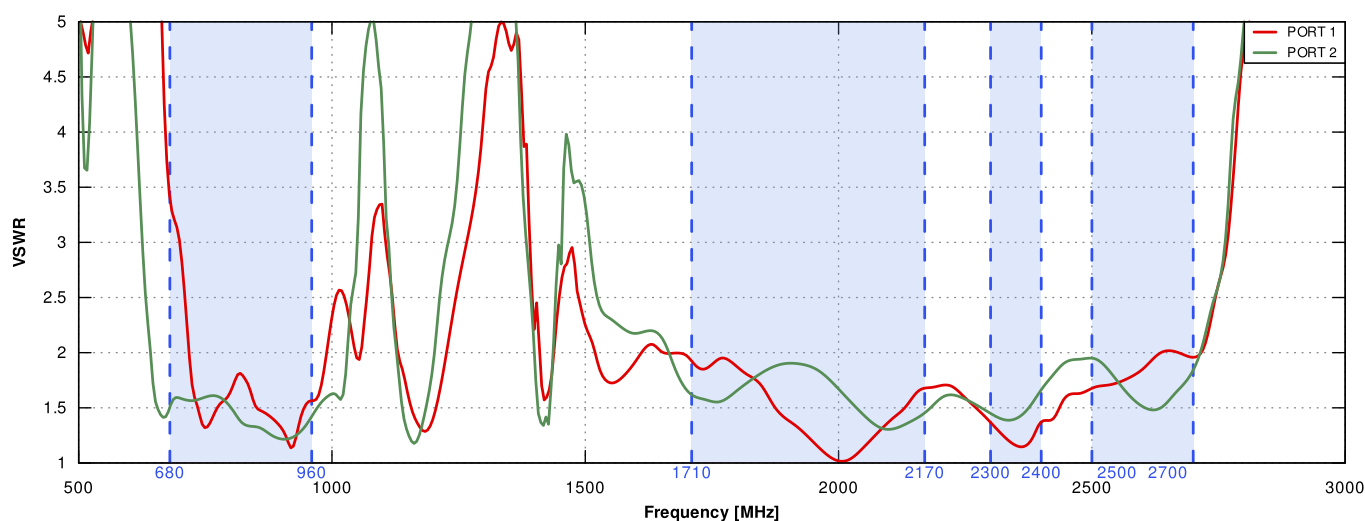


VSWS for LTE antenna PORT 2

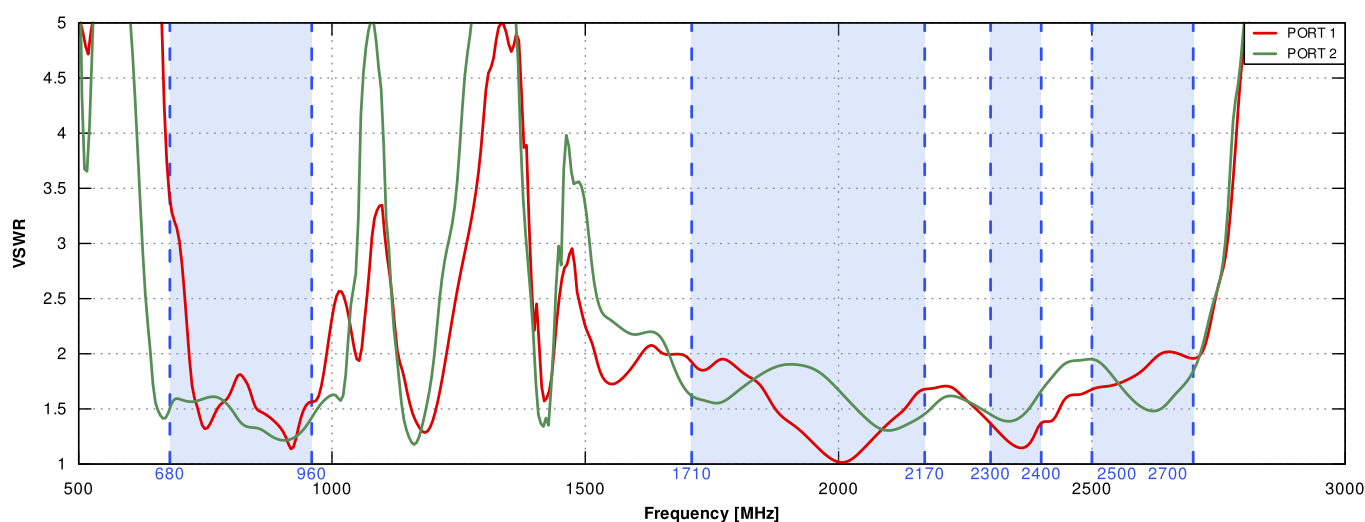


VSWR for Wi-Fi antenna

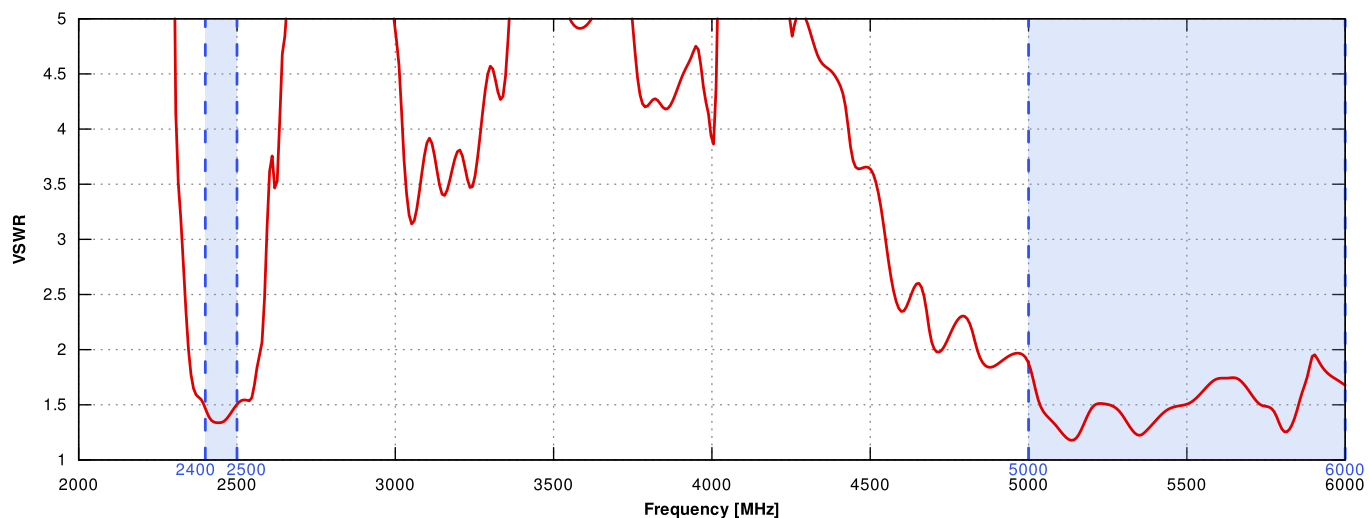


Gain for LTE antenna

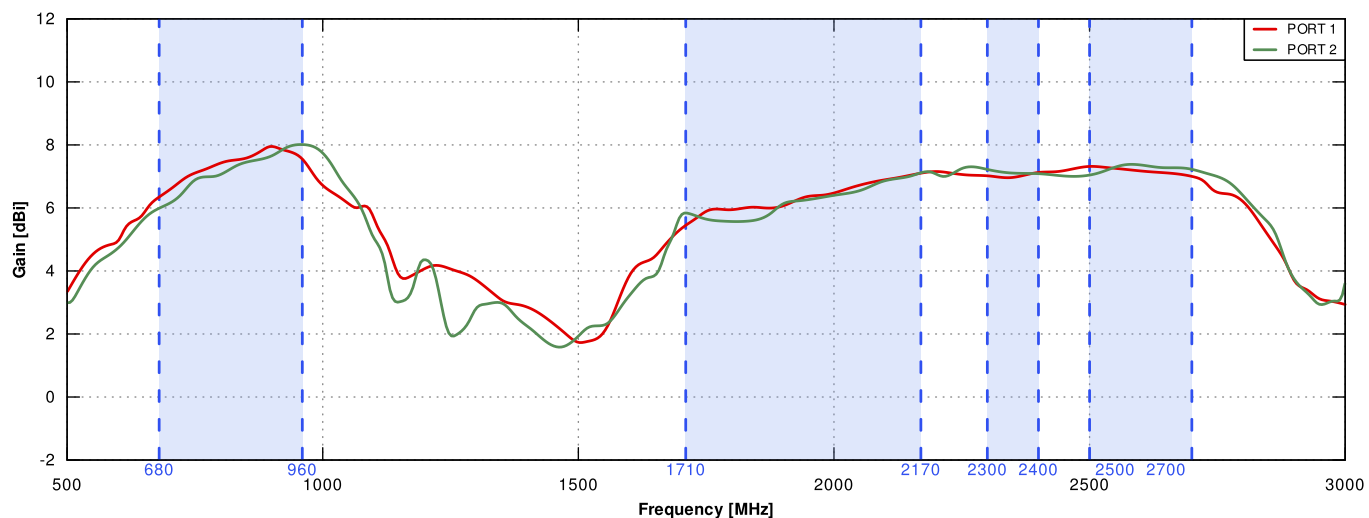



Gain for Wi-Fi antenna

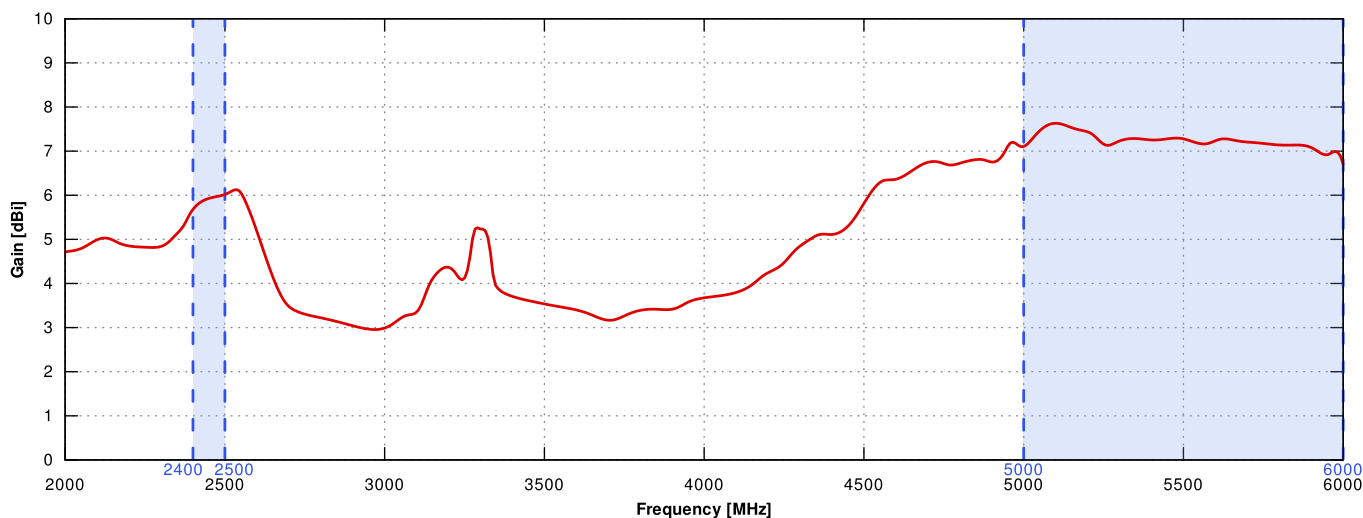



PORT 1 700MHz to 900MHz

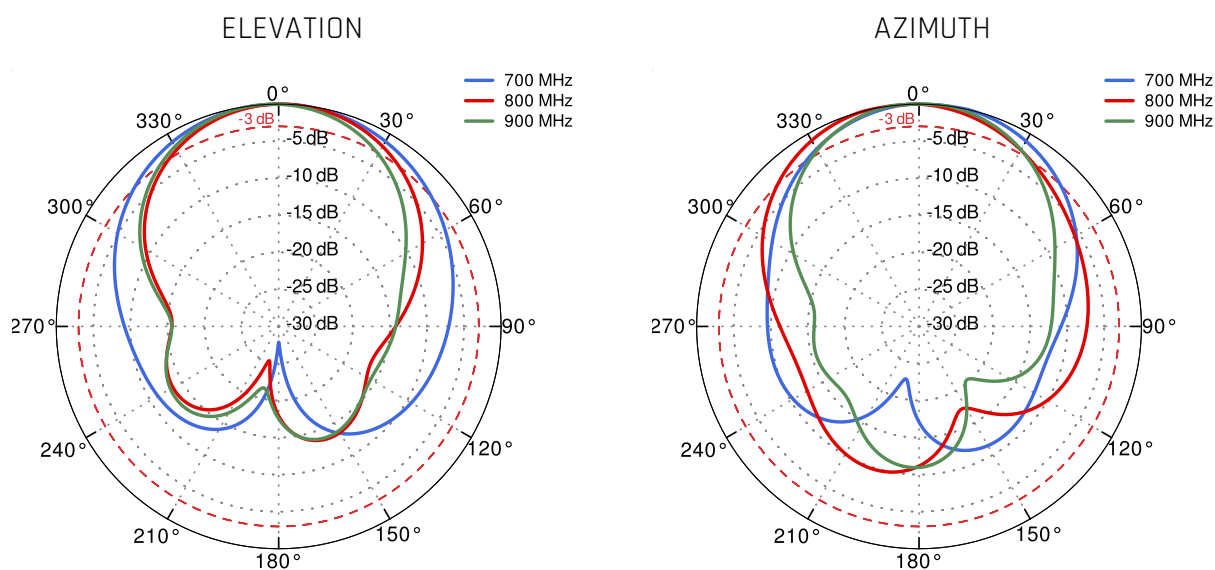



PORT 1 1.71GHz to 2.17GHz

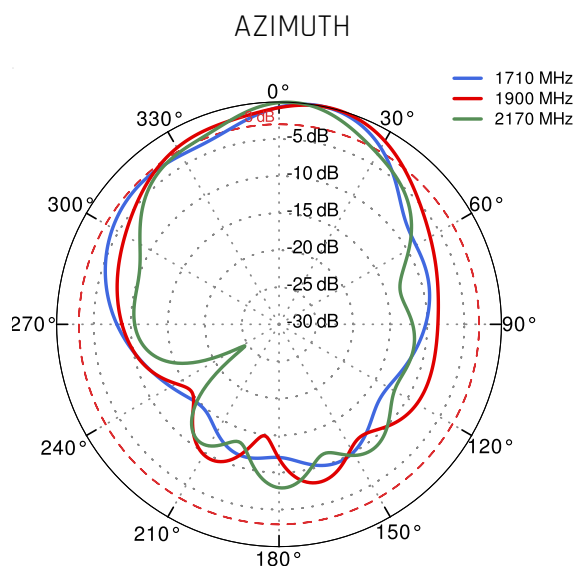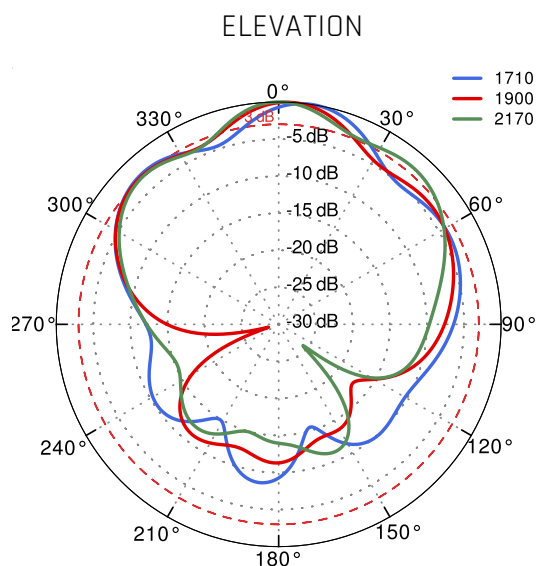



PORT 1 2.3GHz to 2.7GHz

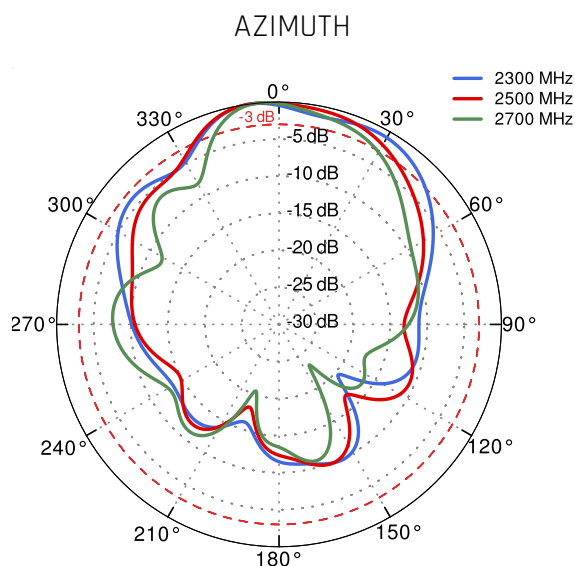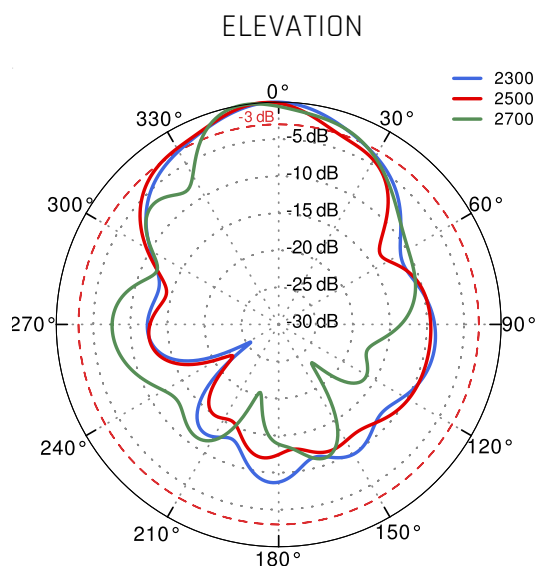



PORT 2 700MHz to 900MHz

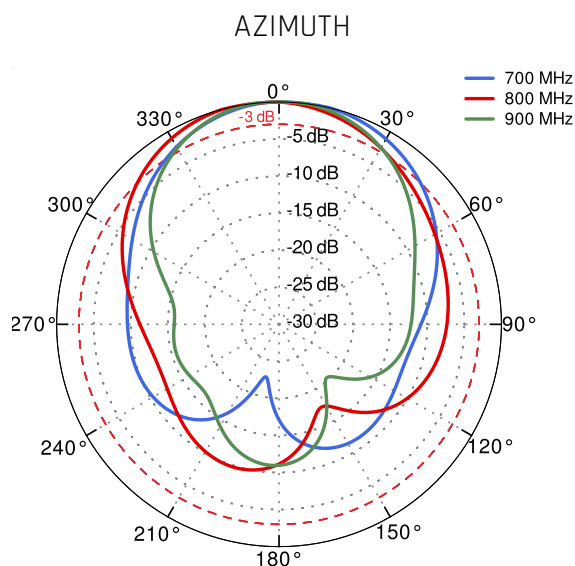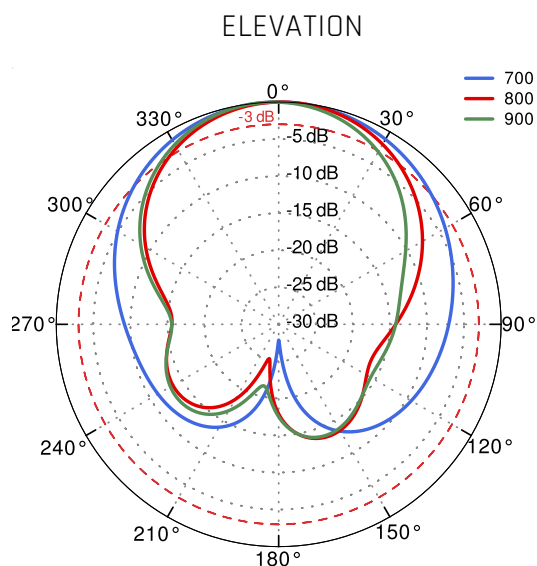



PORT 2 1.71GHz to 2.17GHz

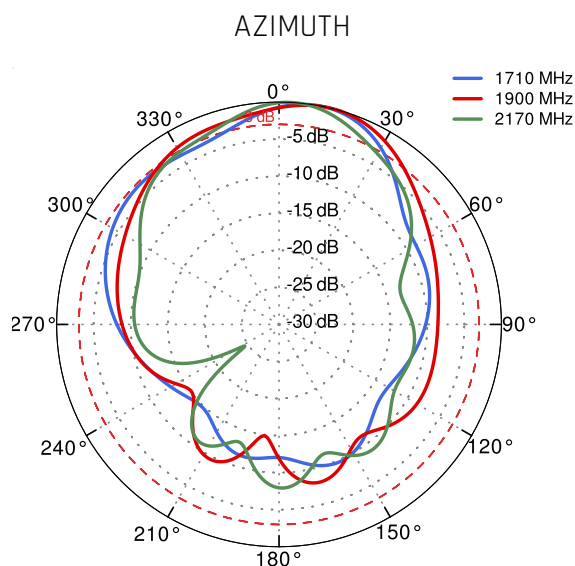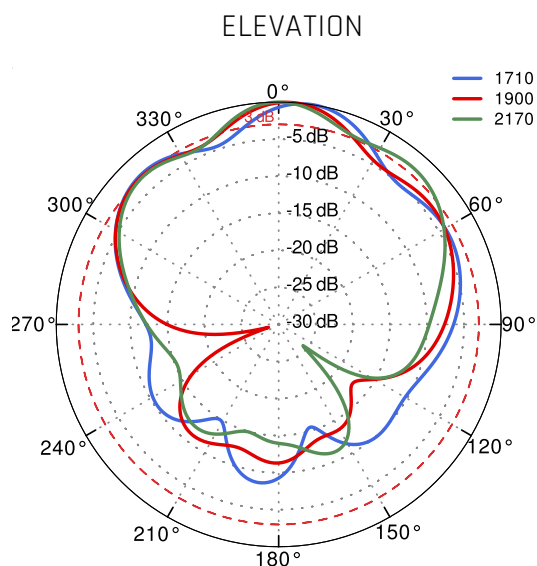

PORT 2 2.3GHz to 2.7GHz

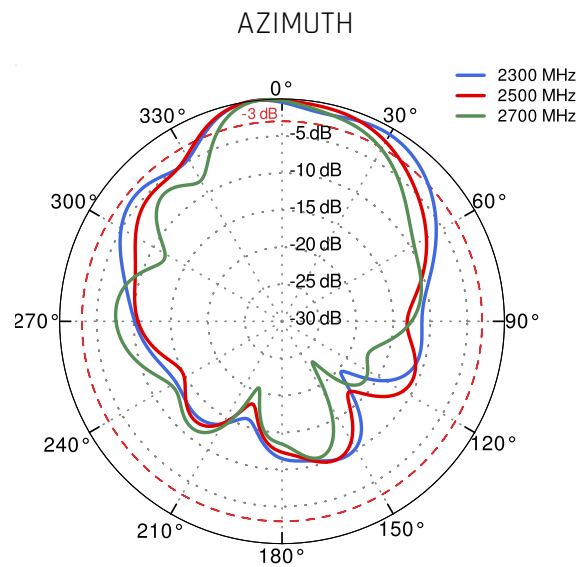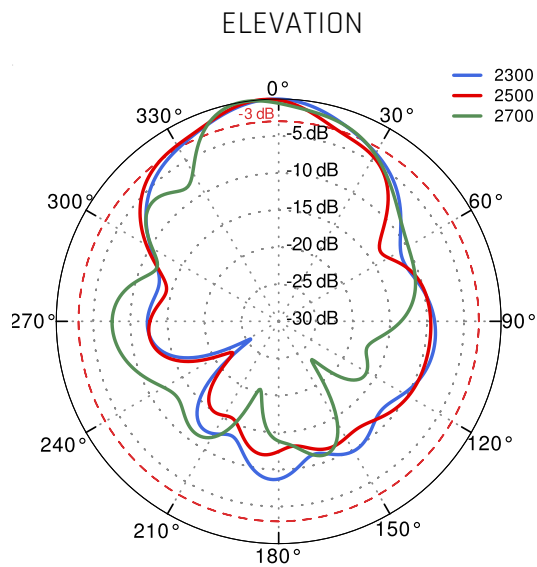

2.4GHz & 5GHz

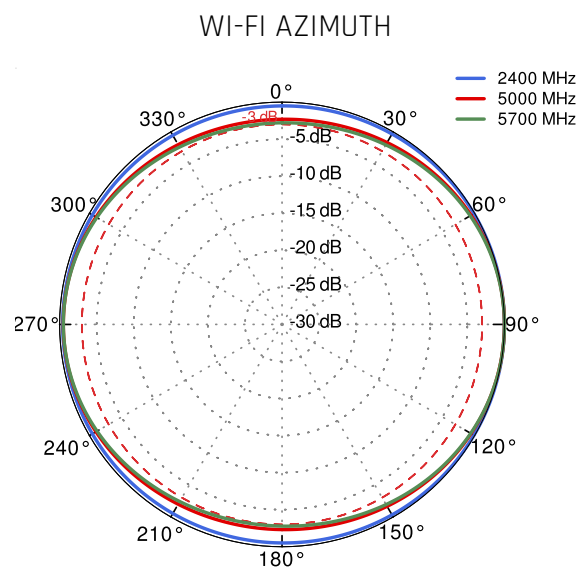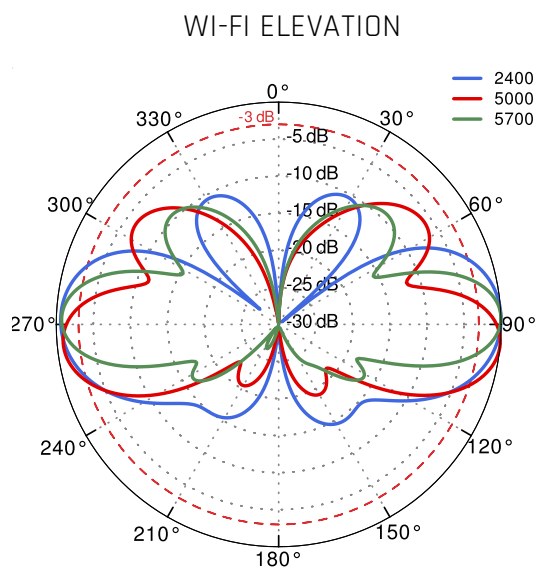

DIMENSIONS

