
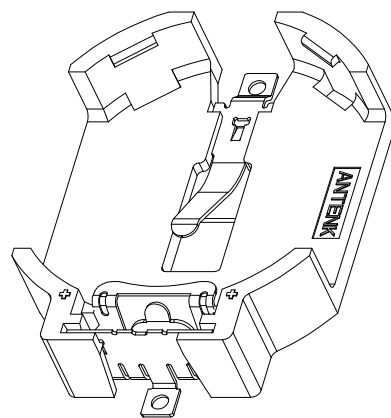


NOTE:
 1. BASE:LCP+40%GF (UL94V-0) BLACK
 2. CONTACTS:PHOSPHOR BRONZE (C5191), T=0.20MM
 3. ELECTRIC:
 a. CONTACT RESISTANCE:30 MILLIOHMS MAX
 b. INSULATION RESISTANCE:1000 MEGA OHMS MIN
 c. DIELECTNIC VOLTAGE:500V AC ONE SEC LEVEL
 d. OPERATING TEMPERATURE:-25° C TO +85° C

Order code:

BT — M — G0 — B — A — 063
 ① ② ③ ④ ⑤ ⑥

- ① BT: Coin Cell Holders
 - ② Apperance for the product
 - ③ Contact Plating
 - ④ With/Without Post
 - ⑤ Packing method
 - ⑥ Product number
- A:With Post
 B:Without Post
 A: Tray B:Bag
 R: Tape & reel

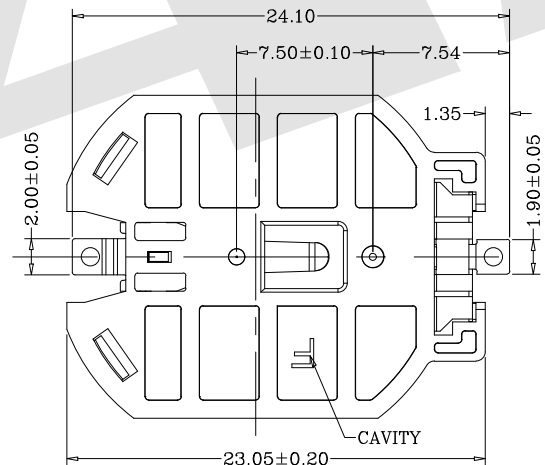

Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW GONGFENG DATE 15/01/2022
 CHECK BobYang DATE 15/01/2022



Antenk ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE:
 Coin Cell Holders FOR CR2032 SMT

DRAWING NO: BT-M-G0-B-A-063

PRODUCT NO: BT-M-G0-B-A-063

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		