

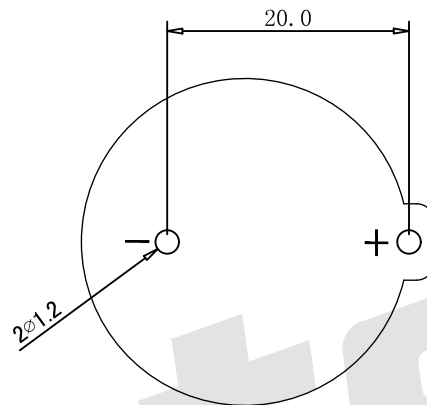



HSF

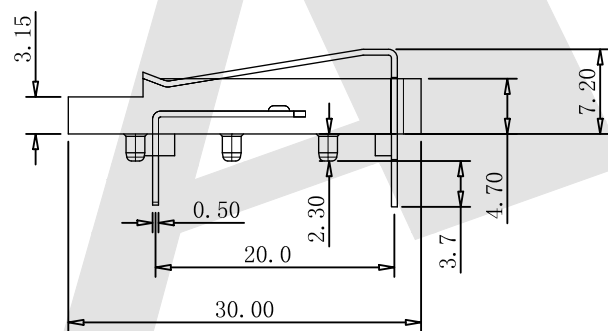

RoHS

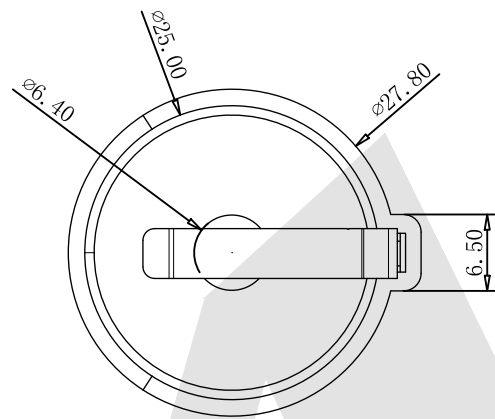

PCB HOLE LAYOUT

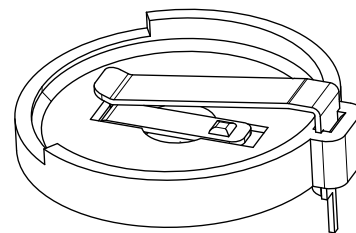

NOTE:

1, Material:

a. Housing: PA BK V0 GF30.15

b. Contact: C2680

(Surface Plating: Sn 10u")

See Ordering Information

2, Electric:

a. Contact Resistance: 30 Milliohms Max

b. Insulation Resistance: 1000 MEGA OHMS Min

c. Dielectric Voltage: 500V AC One Sea Level

d. Operating Temperature: -55° To 105°

Order code:

BT	—	S	—	SN	—	R	—	CR2450D
①		②		③		④		⑤

① BT: Coin Cell Holders

② Appearance for the product

M: SMT TYPE

S: 180 TYPE

R: 90 TYPE

③ Contact Plating

SN: Tin

G0: Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3: 10U" Gold

G4: 15U" Gold

G5: 30U" Gold

④ Packing method

A: Tray packing


R: Tape & reel packing

⑤ Product number

CR2450D

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 17/04/2019
CHECK BobYang	DATE 17/04/2019



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE: Coin Cell Holders For CR2450D

DRAWING NO: BT-S-SN-R-CR2450D

PRODUCT NO: BT-S-SN-R-CR2450D

Revise Dimension Depend Sample

07/02/2022

REV

DESCRIPTION

DATE