


Lithium Manganese Dioxide Coin Battery : Individual Specification


CR1225

Nominal Voltage	3V		A	$\phi 10.4$
Nominal Capacity	50(mAh)		B	$\phi 12.5^{+0.0}_{-0.2}$
Continuous standard load	62(K Ω)		C	1.6
Operating temperature	-20~60°C		D	$2.5^{+0.0}_{-0.3}$
Weight	0.9(g)			


Discharge characteristics

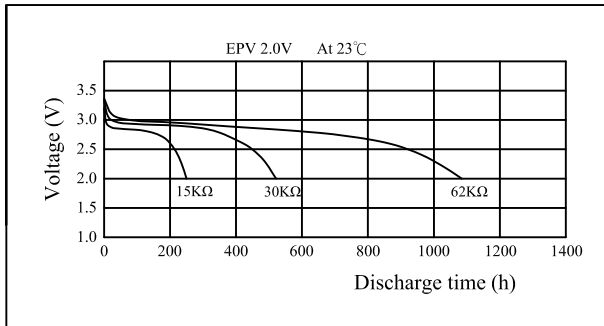


Temperature characteristics

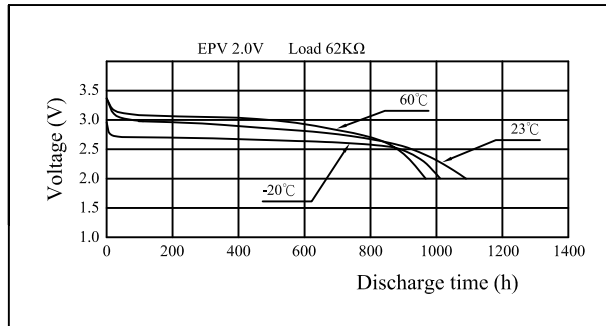


Load vs. Operating voltage

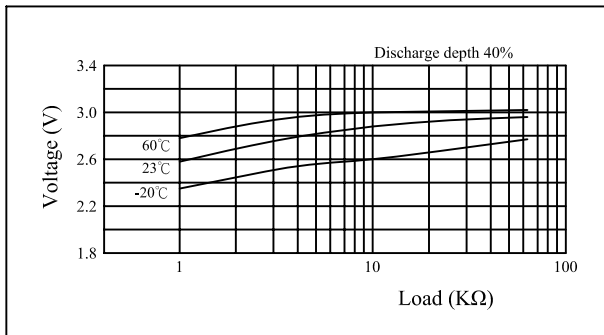

Load vs. Capacity

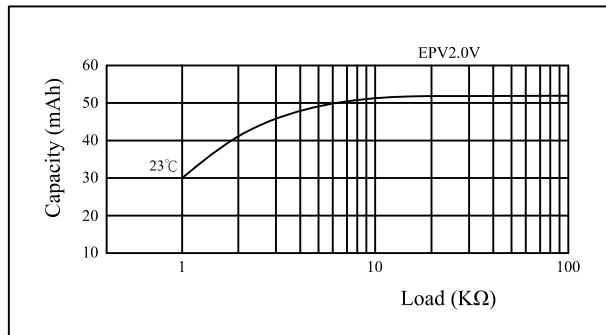

Pulse discharge characteristics

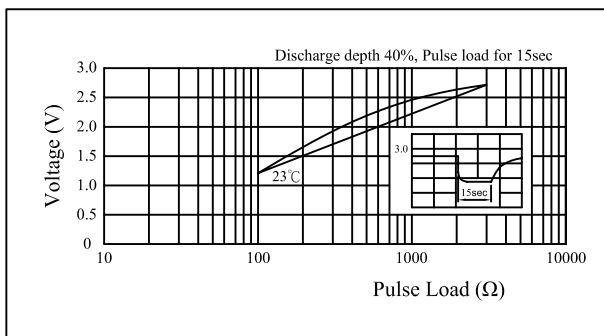

Storage characteristics

