

# Primary Lithium Battery CR14250SC

3.0V [Li-MnO<sub>2</sub>]

1/2AA-size bobbin cell



## BENEFITS

- High voltage response, stable during most of the lifetime of the application
- Energy Density up to 830Wh/L
- Wide operating temperature range(-40 °C ~+85 °C)
- Low Self-discharge Rate(less than 2% per year of storage at +20°C)

## KEY FEATURES

- Optimized battery structure,full discharge capacity
- Super long endurance
- No passivation
- GB 8897.4-2008、 IEC 60086.4:2014 and RoHS
- Easy to recover

## MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

## Cell References Data

### Electrical characteristics

**Open circuit voltage (at 23±2°C)** **≥3.10V**

**Nominal capacity** **1050mAh**

(At +25°C,battery discharged at continuous current 1mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

**Maximum continuous current** **20mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity.)

**Maximum pulse discharge current** **100mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult HCB.

**Storage (recommended)** **≤+30°C**

(for more severe conditions. Consult HCB) **≤75%RH**

**Operating temperature range** **-40°C~+85°C**

(Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult HCB)

## HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park, Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040

Tel: +86(0)27 83248452

Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V2.0 2018 02]

# Primary Lithium Battery CR14250SC



3.0V [Li-MnO<sub>2</sub>]


1/2AA-size bobbin cell

## Physical characteristics

<b>Diameter (max)</b>	<b>14.5mm</b>
<b>Height (max)</b>	<b>25.2mm</b>
<b>Typical weight</b>	<b>10.00g</b>
<b>Li metal content</b>	<b>0.30g</b>

MSDS as per request  
Diode(1N4007, 1N5819)  
PTC(SRS175...)

Tag,wire,connector,etc.available

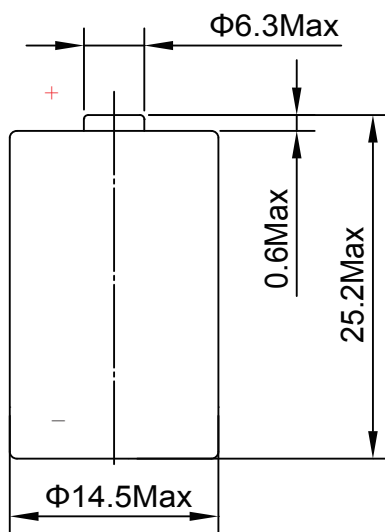


Dimensions in mm (GB1804-m)


## WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C


1. Typical discharge profiles at 23±2°C  
(at mid-discharge)

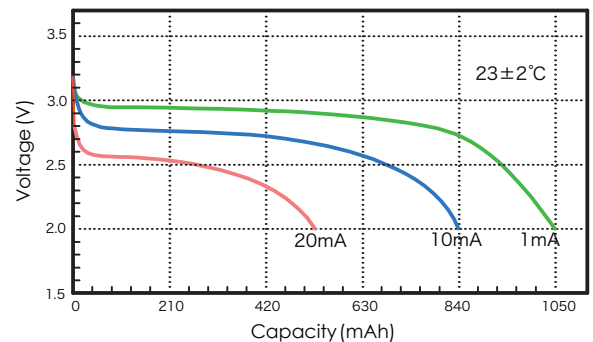

2. Typical discharge profiles with different temperature  
(at discharge stable phase)

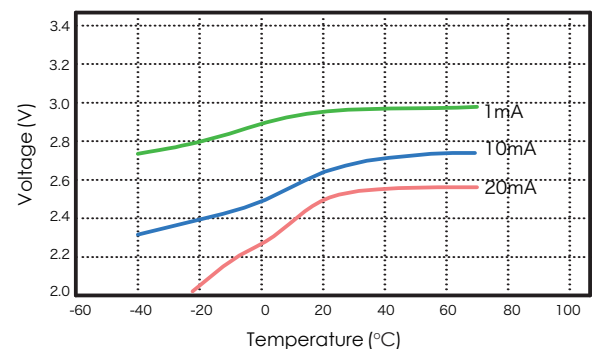

3. Storage characteristics

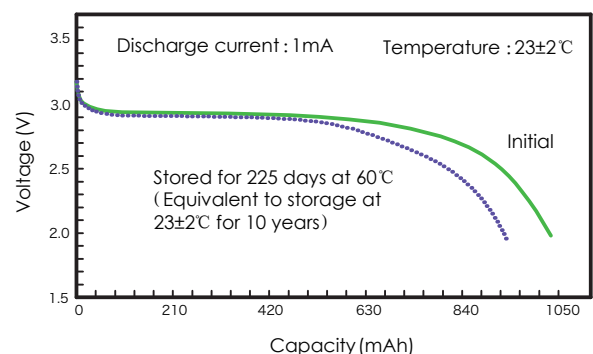

## HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,  
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040  
Tel: +86(0)27 83248452  
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com  
Web: www.cnhcb.com  
No.: HCB-MKT.PM-S[V2.0 2018 02]