
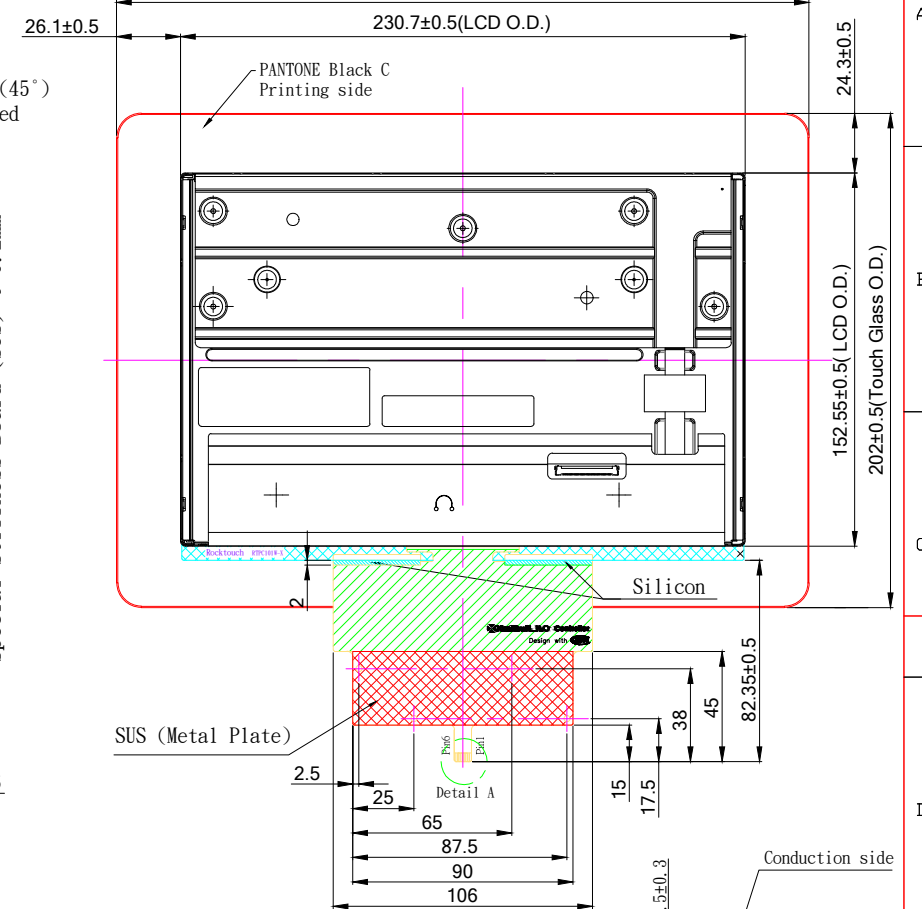
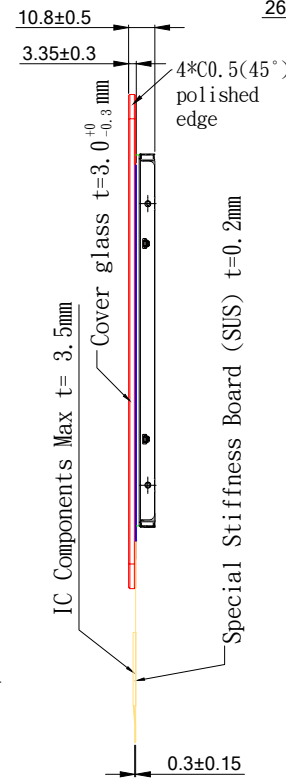



Front VIEW

Back VIEW

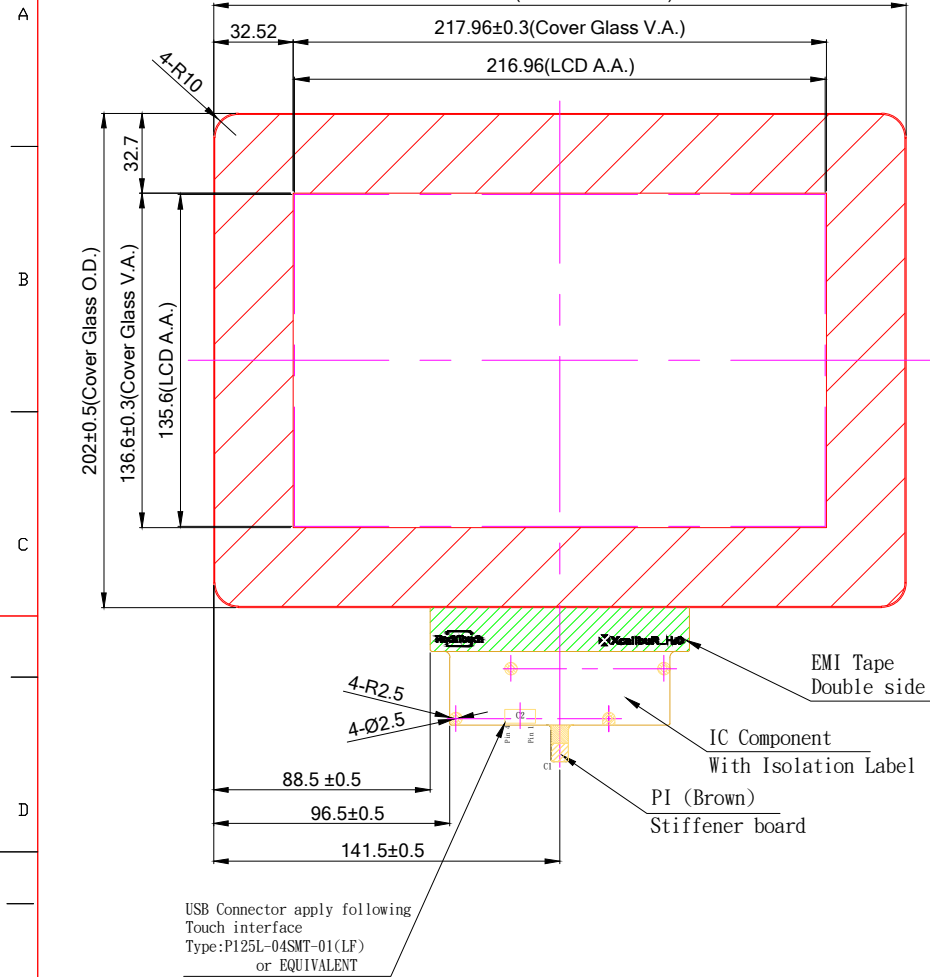

C1:USB Interface	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD
Pin 05	NC
Pin 06	RST

C2:Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

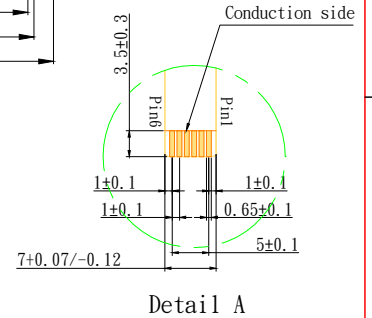

- Note:**
1. Tolerance: ±0.3mm
 2. Touch finger input or special conductive pen
 3. Touch Surface Hardness: 6H (Semi Tempered Glass)
 4. Touch Transmittance: >85% (JIS-K7105)
 5. Touch Surface Treatment: None
 6. If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
 7. USB max ripple acceptable is 50mV, in other case touch will not work correctly
 8. Referring to the integration guide to avoid any integration noise issue
 9. LCD model : G101ICE-L01
 10. Touch model : RTPC101W-H30BP1-U
 11. Assembly Solution : DSA

Customer Approval		Part Number		FLD-101HML20PUSA4	
Date	Rev. Date	Person	Description		
Company					
Name					
Signature	Date	Design By Date	Check By Date	Approved By	
	20181019	Rick	20181019	Kevin	

