

PRODUCT SPECIFICATION

Model No.: FYL-3019SGW1A-CA

Descriptions:
■ Dice material: AlGaAs /GaP
■ Emitting Color: Red/Yellow green
■ Device Outline: Φ3mm round type.
■ Lens Type: White Diffused



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

NINGBO FORYARD OPTOELECTRONICS CO.,LTD.

Add:NO.115 Qixin Road Ningbo Zhejiang China

Zip:315051

Tel: 0086-574-87933652 87927870 87922206

Fax: 0086-574-87927917

E-mail: Sales@foryard.com (General)

[Http://www.foryard.com](http://www.foryard.com)






■ Absolute maximum ratings(Ta=25 °c)

Parameter	MAX.	Unit
Power Dissipation	S 75	mW
	G 75	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +100°C	
Lead Soldering Temperature[4mm(.157") From Body]	260°C for 5 Seconds	


■ Electrical and optical characteristics(Ta=25 °c)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	S -	55	-	mcd	I _F =20mA
		G	40			
Viewing Angle	2θ _{1/2}	S -	40	-	Deg	
		G	40			
Peak Emission Wavelength	λ _p	S	660		nm	
		G	568			
Dominant Wavelength	λ _d	S 640	645	650	nm	
		G 567	572	577		
Spectral Line Half-Width	Δλ	S 25	30	35	nm	
		G 15	20	25		
Forward Voltage	V _F	S 1.7	2.0	2.4	V	
		G 1.8	2.3	2.5		
Reverse Current	I _R			10	μA	V _R =5V

■ **Typical Electrical Characteristics Curves**
(25 °c Ambient Temperature Unless Otherwise Noted)

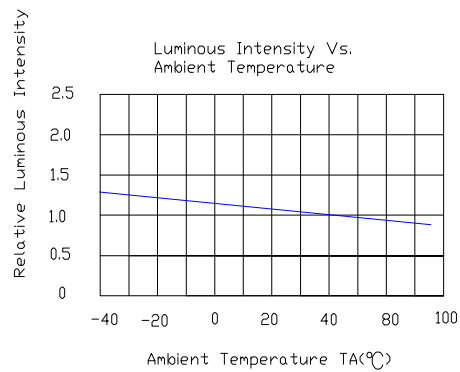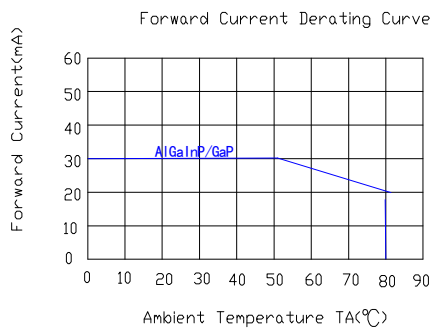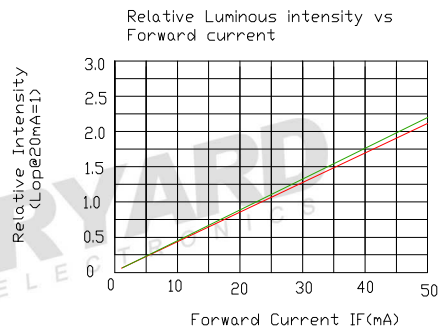
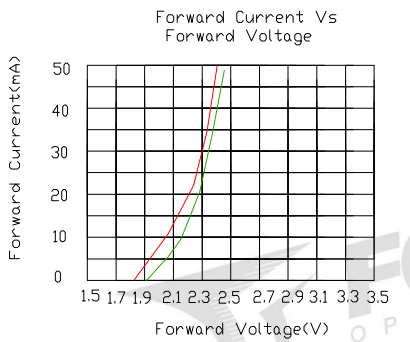
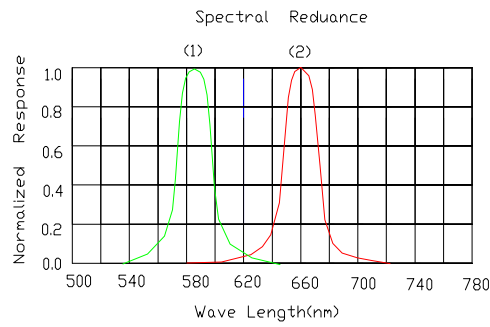


Radiation pattern.

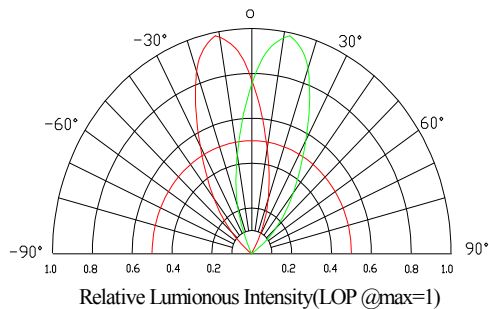

Model No.	FYL-3019SGW1A-CA
Rev.	A

■ LAMP PACKING.

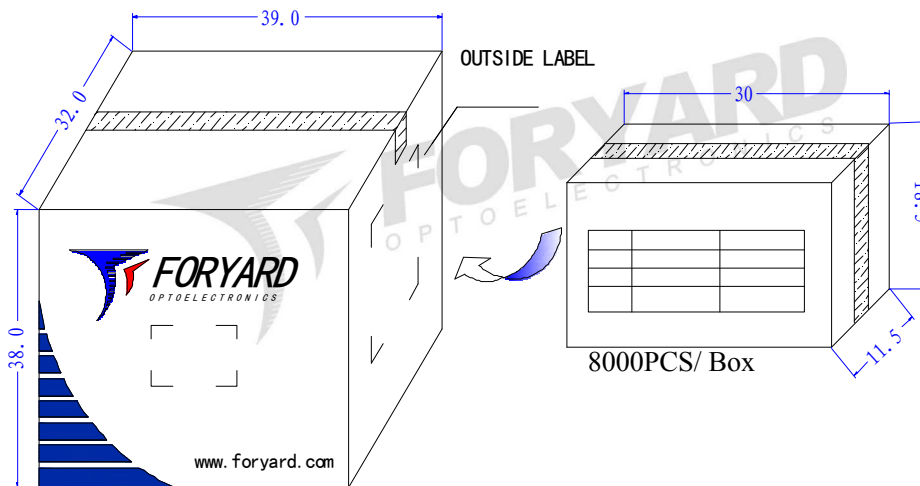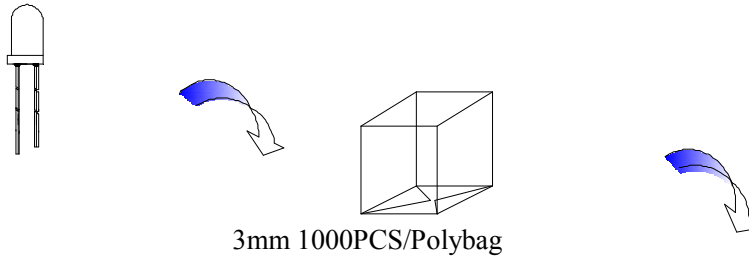

OUTSIDE LABEL