


# ITC211 NEW

21.5" FHD TFT LCD Slim Bezel Modular Panel PC with Intel® Smart Display Module (SDM) CPU Card

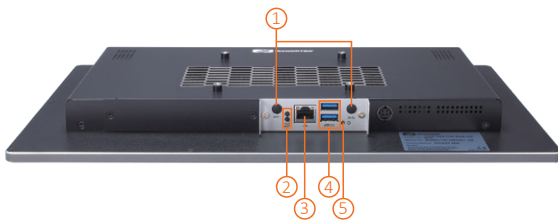

- |                                 |               |
|---------------------------------|---------------|
| 1. Antenna reserved holes       | 3. LAN        |
| 2. Power Button<br>Reset Button | 4. 2 x USB3.0 |
|                                 | 5. Status LED |

## Features

- 21.5" FHD TFT LCD
- 16:9 aspect ratio; 250 nits brightness
- Diamond-cut slim bezel under 46.3 mm thickness
- Projected capacity touch supported (10-point touch)
- Swappable Intel® SDM CPU card
- Modular design for various applications
- Supports an add-on RFID reader, barcode scanner, and camera modules (optional)
- Supports a thermal printer (optional)
- Supports desktop stand, floor stand, and wall mount (optional)



## Specifications

LCD Panel	Display Type	21.5" FHD TFT LCD
	Brightness (cd/m <sup>2</sup> )	250 nits
	Resolution	1920 (H) x 1080 (V)
	Aspect Ratio	16:9
Main System	Intel® SDM Small (SDM-S, 60 x 100 mm) Intel® SDM Large (SDM-L, 175 x 100 mm)	
I/O Connector (Depends on SDM I/O)	SDM500L	1 x Power button with LED 1 x GbE LAN 4 x USB 3.0 Type A 1 x Audio output 1 x Microphone input 2 x SMA antenna reserved hole
	SDM300S	1 x GbE LAN 2 x USB 3.0 Type A 2 x SMA antenna reserved hole
Touchscreen	Projected capacitive multi-touch	
Stereo Speaker	2 x S.P.L. 88dB, 1.5W, 4 ohm	
Power Supply	24V AC to DC power adapter	
Power Consumption	Average 60W	
Dimensions	526.1 mm (20.7") x 46.3 mm (1.8") x 317.6 mm (12.5")	
Weight (net)	6.9 kg (15.2 lb)	
Operating Temperature	0°C to +40°C (+32°F to +104°F)	
Operating Humidity	20%- 90%, non-condensing	
Certifications	CE, FCC Class A	

---

**CPU Card Selection: SDM300-S**

CPU	Quad-core Intel® Pentium® N4200 1.1GHz processor or dual-core Intel® Celeron® N3350 1.1GHz processor	
System Memory	Onboard LPDDR4 2400 MHz 4GB (8GB optional)	
BIOS	AMI UEFI BIOS	
Storage	eMMC 64GB onboard	
Watchdog Timer	255 levels, 1 to 255 sec.	
Onboard Graphics	Intel® HD Graphics 505/500 (depending on CPU card)	
I/O Connector	Rear Side	1 x GbE LAN 2 x USB 3.0 Type A 2 x SMA antenna reserved hole
Expansion Interface	1 x M.2 Key E 2230 slot (for Wi-Fi)	

**CPU Card Selection: SDM500-L**

CPU	Intel® Celeron® 4305UE 2.0GHz processor or Intel® Core™ processor (optional)	
System Memory	2 x 260-pin DDR4-2400 SO-DIMM slot, up to 64GB	
BIOS	AMI UEFI BIOS	
Storage	1 x M.2 Key B 2242 slot 1 x M.2 Key M 2280 slot	
Watchdog Timer	255 levels, 1 to 255 sec.	
Onboard Graphics	Intel® UHD Graphics 620/610 (depending on CPU card)	
I/O Connector	Rear Side	1 x Power button with LED 1 x GbE LAN 4 x USB 3.0 Type A 1 x Audio output 1 x Micphone input
Expansion Interface	1 x M.2 Key E 2230 slot (for Wi-Fi)	

## Ordering Information

**Standard**

ITC211-SDM300S-N4200 (P/N: TBD)	21.5-inch FHD PCAP touch slim bezel panel with SDM300S Intel® Pentium® N4200 processor, onboard DDR4 4G, eMMC 64GB, 1 LAN, 2 USB 3.0, and 2 speaker
ITC211-SDM500L-i5-8365UE (P/N: TBD)	21.5-inch FHD PCAP touch slim bezel panel with SDM500L Intel® Core™ i5 8365UE processor, 2 SO-DIMM slot, 2 M.2 SSD slot, 1 LAN, 4 USB 3.0, 2 speaker, and 1 Mic-in/Line-out

\*Other SDM module by request.

## Packing List

1 x ITC211 with SDM module
1 x Adaptor

## Optional Accessories

RFID module

Barcode scanner module

Camera module

Thermal printer with counter-top stand or floor stand

SSD M.2 2280-B-M (SDM500L)

SSD M.2 2242-B (SDM500L)

DDR4 SO-DIMM: 4GB~32GB (SDM500L)

822T1500050E Mounting kit

8812T1500A0E Wi-Fi kit

59903000000E AC power cord EU, L=1830 mm

599000001100 AC power cord US, L=1830 mm

59909010000E AC power cord China, L=1830 mm

59906000010E AC power cord Japan, L=1830 mm

59905000000E AC power cord Australia, L=1830 mm

59918000000E AC power cord Brazil, L=1830 mm

## Optional OS Installation

Windows® 10 IoT 64-bit

## Dimensions

