
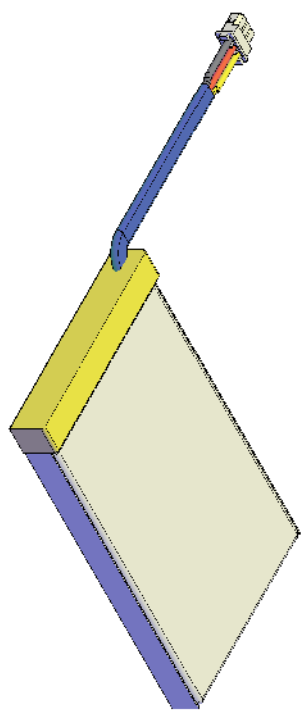

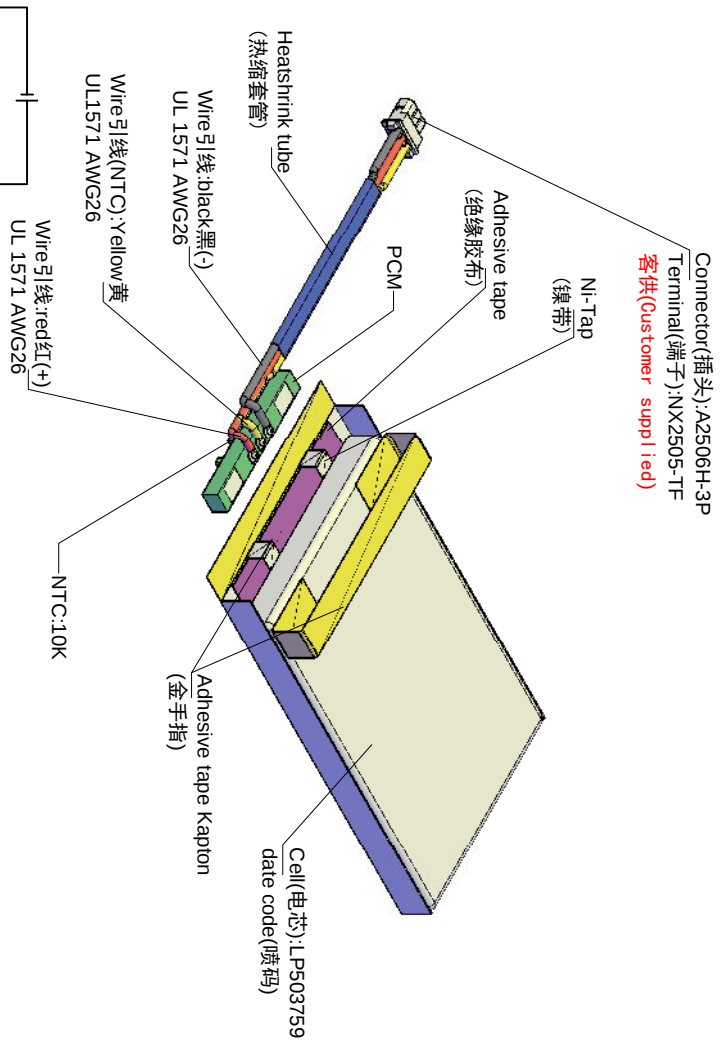


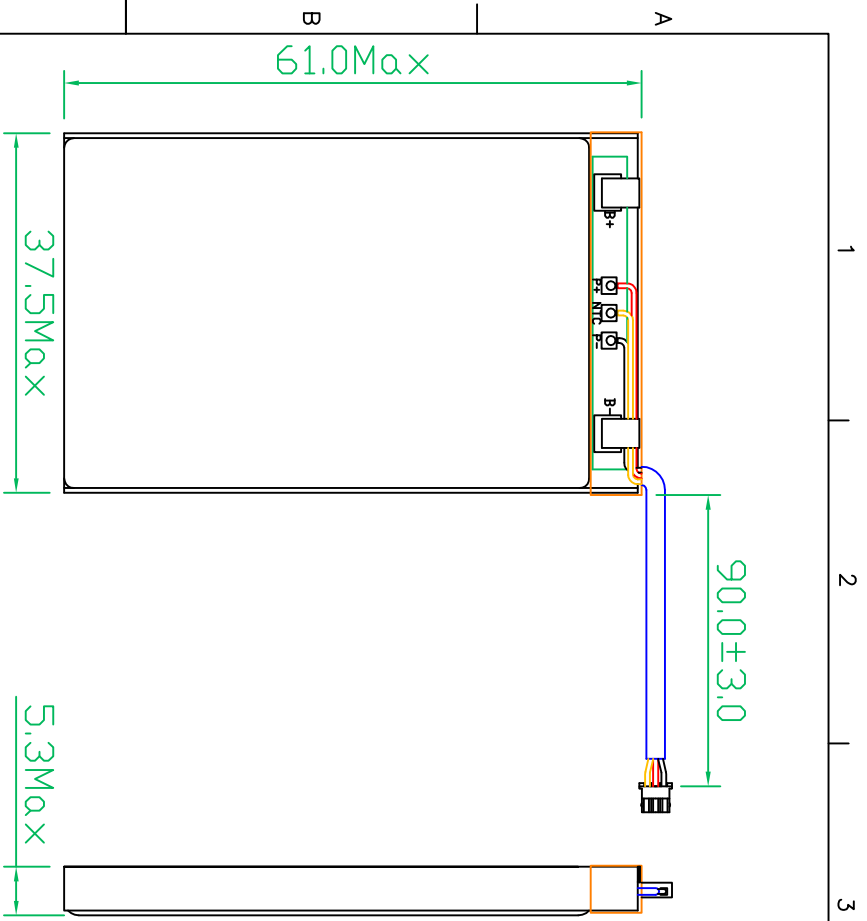

Battery pack specification (电池组规格)	Model:	LP503759	Overcharge Detection Voltage(V)		4.28±0.05
	Min.Capacity 最低容量 (mAh) (0.2C,25±3°C)	1150	Overdischarge Detection Voltage(V)		3.0±0.1
	Single cell capacity (单体电芯容量)		过放保护电压 (V)		
	Typical Capacity 典型容量 (mAh) (0.2C,25±3°C)	1250	Limited to Max loading current 仅用于最大的负载电流 peak value (A)		constant (A) 持续 1.0 (A)
	Single cell capacity (单体电芯容量)		Customer required Max loading current 客户要求最大的负载电流 peak value (A)		constant (A) 持续 2.5 (A)
Ambient Conditions (环境温度)	Nominal Voltage 标称电压 (V)	3.7	Battery protection Related Value: (相关的电池保护值)		
	Internal impedance 内阻 (≅) (mΩ, AC 1KHz)	200	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于 EEMB 提供值, 请提出来, 实际的应用情况对 PCM 的设计至关重要)		
	Charge Temp. 充电温度 (°C)	0~45			
Discharge Temp. 放电温度 (°C)		-20~60			
	Humidity (湿度)	65±20%			

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. RoHS compliant(严格按照ROHS要求生产).

EEMB BATTERY		Drawn:	Leiyuanchao	Revise No.:	E4-2009
Title	LP503759-PCM-NTC-LD/	Checked 1:	Erica	Projection:	
File NO.	AI2858	Checked 2:		Page:	1/1
		Approved:		Scale:	1:2:1
		Draw Date:	2016/06/27	Unit:	mm