

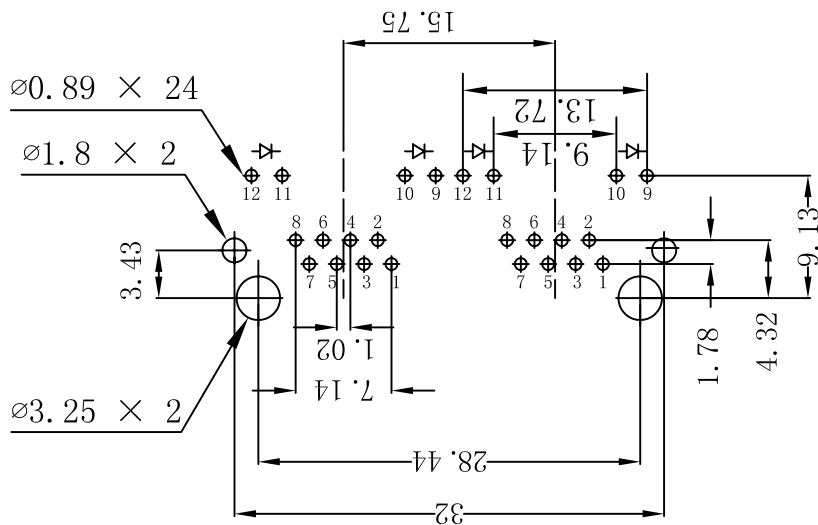


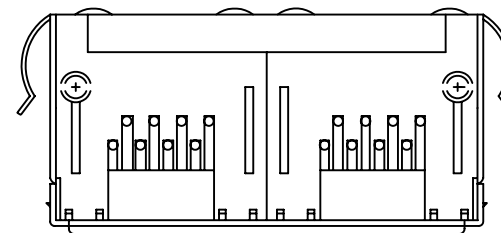


Mechanical:

REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		23/07/2009	

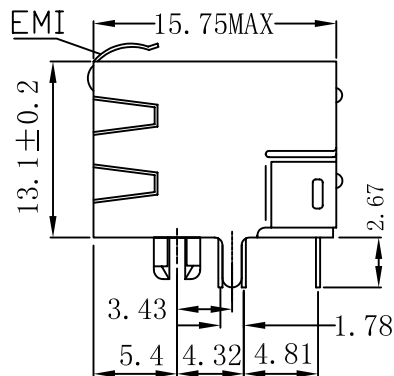

PC Board Layout (TOP VIEW)  
Component Side Shown

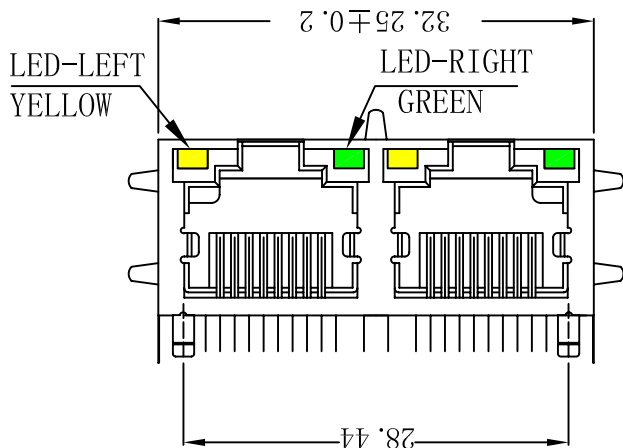

- PCB JACK Specification
1. Insulation Resistance: 500M Ω MIN @ 500 VDC
  2. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.
  3. Durability: 600 Mating Circles MIN.
  4. Gold Plating: (Gold Flash; 1.5; 3; 6; 15; 30; 50) u" inch
  5. (1) Storage: -40°C to +85°C  
(2) Operation: -40°C to +85°C  
(3) Wave solder temperature: 230°C to 250°C, 5~10 Sec.

X:X	±0.20	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.10	CHKD:	Title: SIDE ENTRY PCB JACK WITH SHIELD	
X:XXX	±0.05	DR: TOM	PART NO.: LPJE201AGNL	
ANGLES	±1°	UNIT: mm		
	SCALE: 1/1	SHEET: 1/1	REV: A	DWG NO.: LP09072302