



REV.	SPECIFICATION	ECN NO.	APPD.

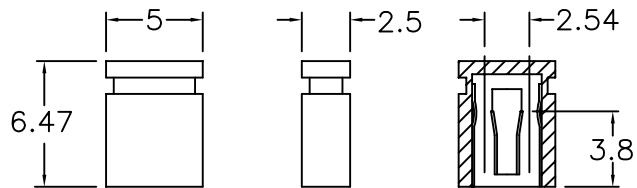

A Type

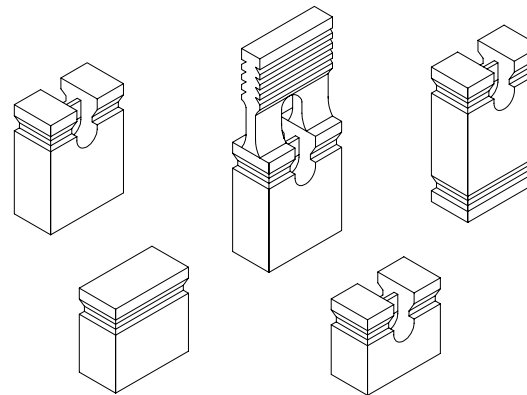

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Plating: Gold Plated in Contact Area, Nickel Plated Overall.

Electrical Characteristics:


Current Rating: 1 AMP.

Insulator Resistance: 1000M Ω min. at DC 500V.


Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C~+105°C.


***RoHS Compliant**

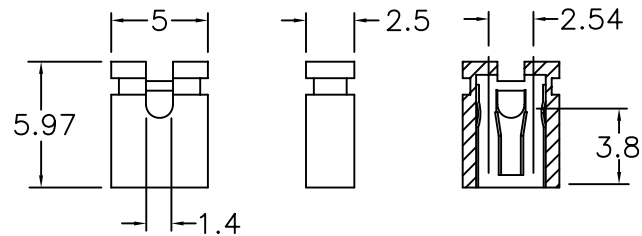


B Type

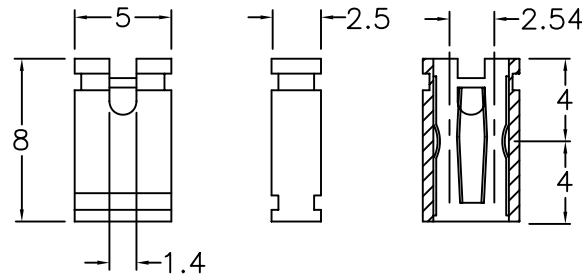

D Type

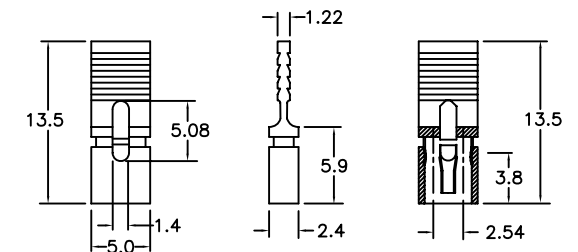

WE Type

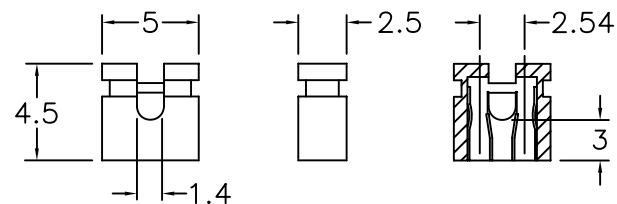

C Type

2006-

Series

A

A: A Type

B: B Type

C: C Type

D: D Type

WE: WE Type

B

B: Black Insulator

* R: Red Insulator

* U: Blue Insulator

B

B: Bulk Package

Tolerances	Dwg. No.	2006D02002	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ± 0.5	Projection		2006 Series		P/N: 2006-X-BB			
.x = ± 0.25	Unit	mm	Scale	1:1	SHEET			
.xx = ± 0.15	Drawn By	Peggy03/13'12	①		1/1	Ver.No.	A6	

2006 Series
Mini Jumper 2.54mm