


2015 Series

Pin Header 2.54mmX2.54mm(0.100"X0.100")

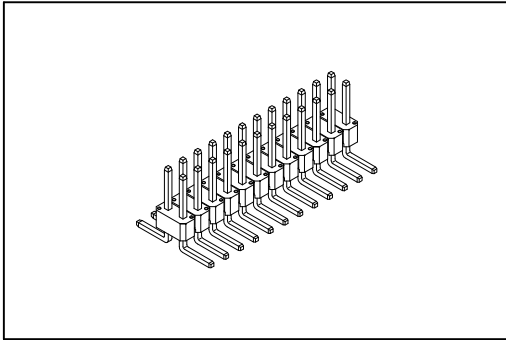

Material:

Housing: High Temperature Plastic UL94V-0. withstands IR and VPR soldering methods.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.





Contact Resistance: 20mΩ max.

Operating Temperature: -40°C~+105°C.

Features:

- * Double row Surface Mount.
- * Low profile insulator 2.5mm (0.100").
- * Customs design provides wide product flexibility.

Mates with: 1001, 2006, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049.

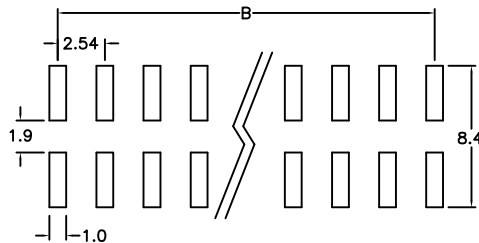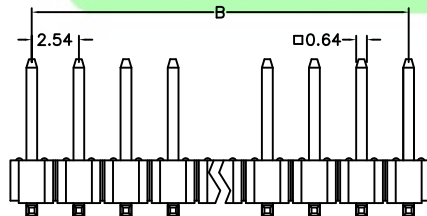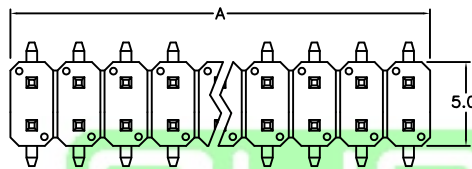

P.C. Board Layout

Position	4 Thru 80
Dimension	
A	2.54 X No. of Positions /2
B	2.54 X No. of Positions /2-2.54

Ordering information

2015- Series **2** Double Row **X** No. of Pin Per Row **40** **G** G: Gold Plated T: Tin Plated **00** 00: G/F **D** D: SMD Type **B** B: Bulk Package

Custom Design: S.M.D. (i.e. 2015-2 X 40 G 00 D /L1 /L2 /L3)
L2: Mating length