2112 Series
Pin Header 2.0mm(0.079")

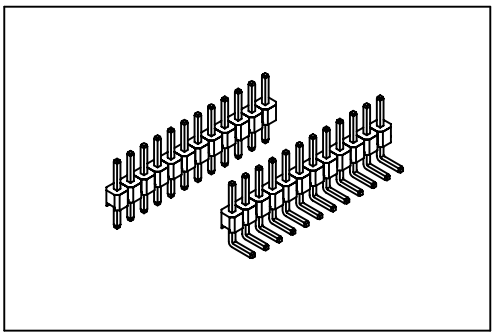

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.
Plating: Gold plated over nickel.
Tin plated over nickel.

Electrical Characteristics:
Current Rating: 1 AMP.
Insulator Resistance: 5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: −55°C ~+105°C .

Features:
* Low Profile 2.00mm(0.079").
* Available in Straight and Right angle.
* Side-to-side and end-to-end stackable.
* Custom design provides wide products flexibility.

Mates with: 2106,2141,2142,2143,2148.





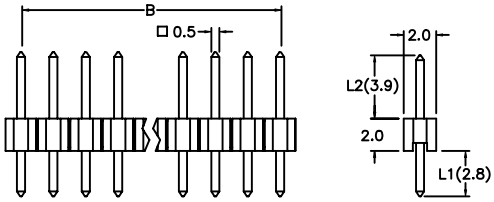

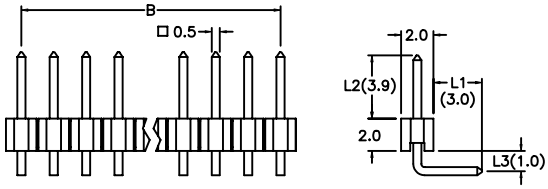



P.C. Board Layout

Position	2 Thru 40
Dimension	
A	2.0 X No. of Positions
B	2.0 X No. of Positions −2.0

Ordering information

2112-	1	X	40	G	S
Series	Single Row		No. of Pin Per Row	G: Gold Plated T: Tin Plated	S: Straight R: Right Angle

Custom Design: Straight (i.e. 2112-1 X 40 G S/L1 /L2)
Right Angle (i.e. 2112-1 X 40 G R/L1 /L2 /L3)
L1: Dip Length
L2: Mating length
L3: Extended Length (Currently only 1.00mm available.)