



Front VIEW

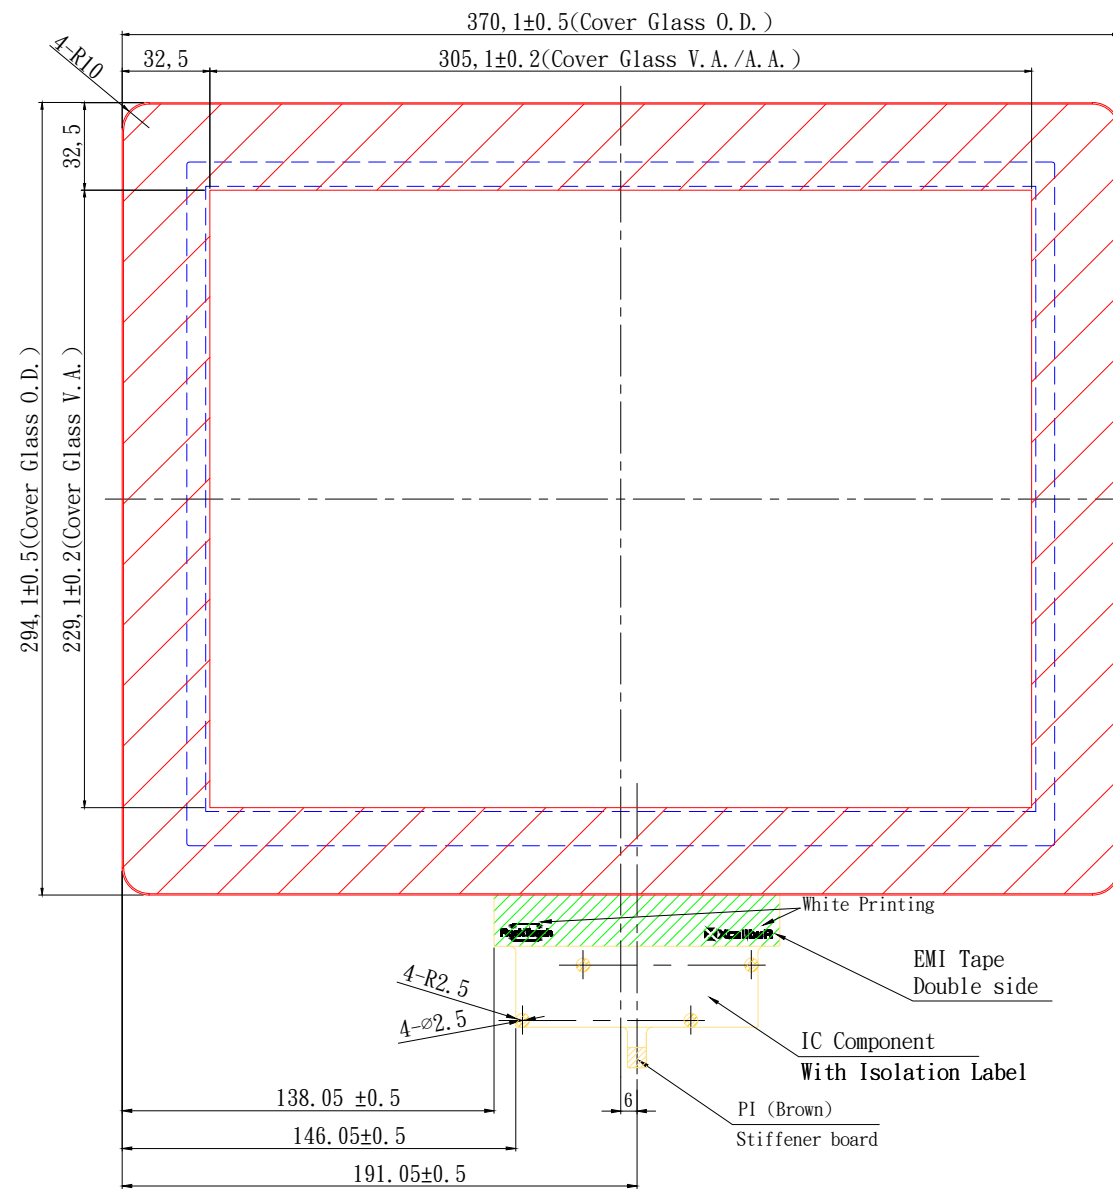

Back VIEW

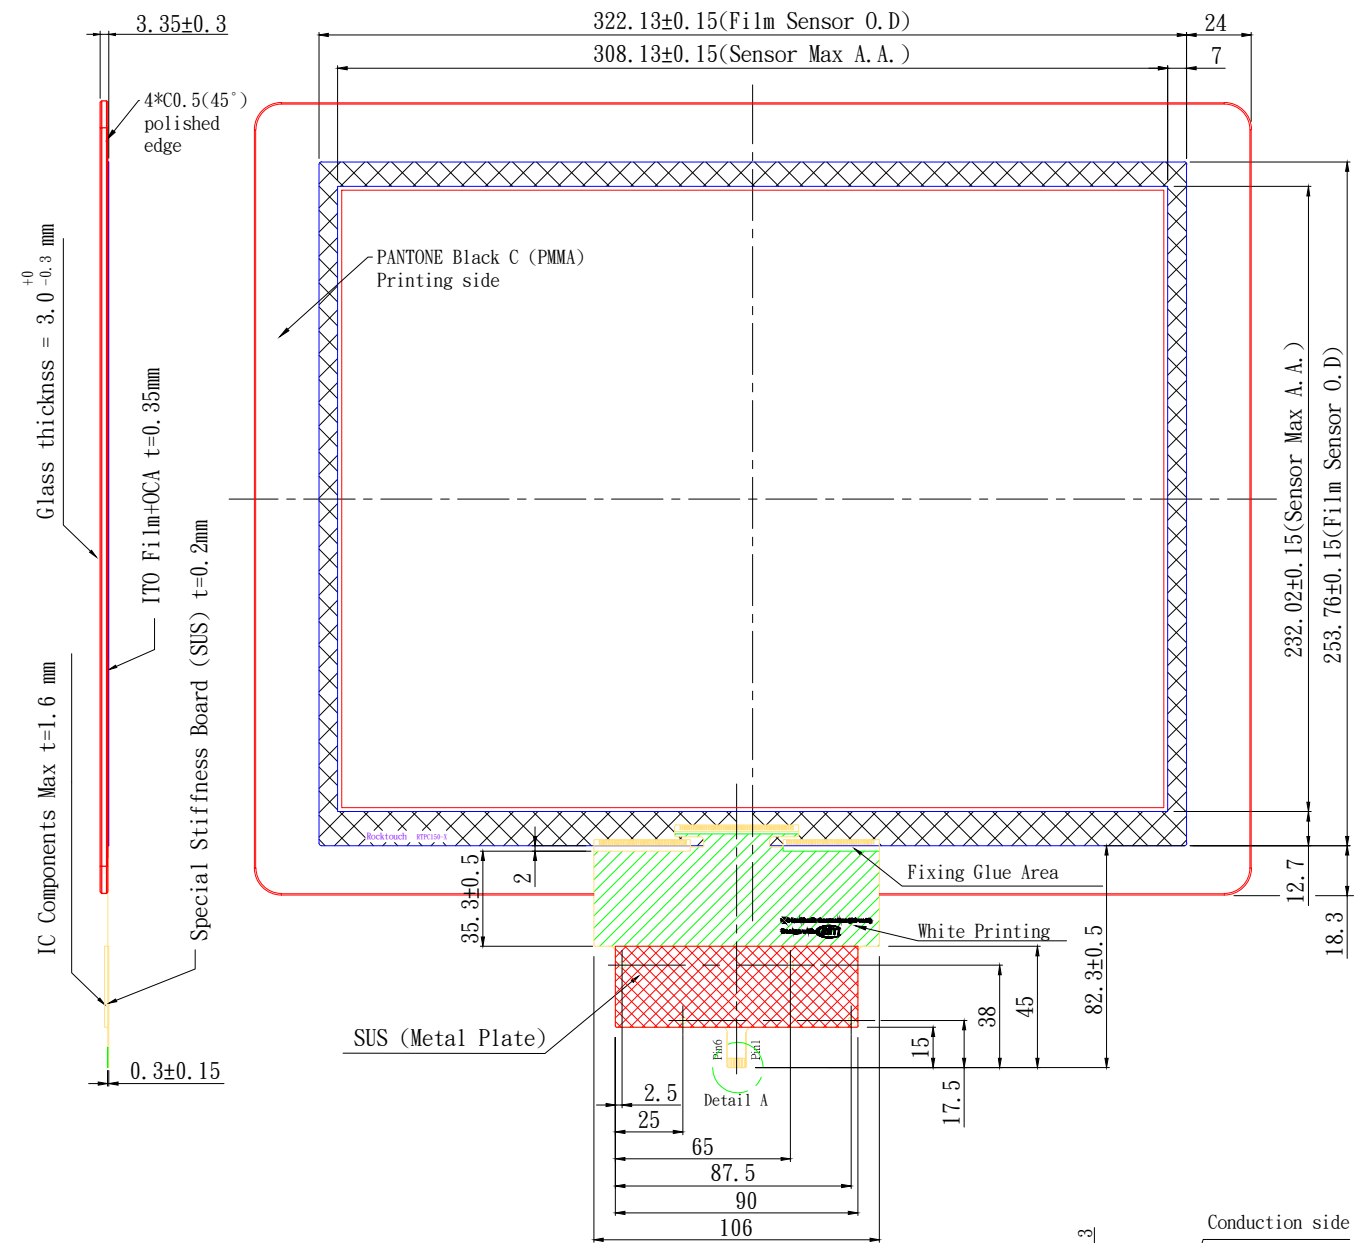

Printing Info :

Background Printing Type : PMMA CERAMIC 700°C
 Logo Printing Type : PMMA
 Background Color : Pantone Black C
 Logo Color :


Note:

- To choose the interface just add at the end of the part number the following : - U for USB
 - I for I2C
 - R for RS-232
- Tolerance: +-0.3mm
- Finger input or special conductive pen (Pencil Feature under Special Request)
- Surface Hardness: 7H (Semi-Tempered Glass)
- Transmittance: >85% (JIS-K7105)
- Surface Treatment: depending by cover lens
- Distance between LCD and touch panel need to be minimum 1.0mm otherwise touch maybe will not work correctly
- If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
- USB max ripple acceptable is 50mV, in other case touch will not work correctly
- Referring to the integration guide to avoid any integration noise issue

USB(OPTIONAL)	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD(5V)
Pin 05	NC
Pin 06	RST

I2C(OPTIONAL)	
Pin 01	GND
Pin 02	SDA
Pin 03	SCL
Pin 04	VDD(5V)
Pin 05	INT
Pin 06	RST

RS-232(OPTIONAL)	
Pin 01	GND
Pin 02	RX
Pin 03	TX
Pin 04	VDD(5V)
Pin 05	NC
Pin 06	RST

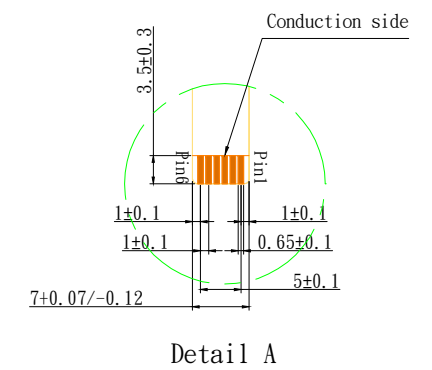

圖號 RTPC150-X30BP1



版	年	月	日	設	計	審	查	變	更	內	容
設	計	2014/08/07	Candy	審	查	Kevin	承	認			