

# UL2651 AWG28 PVC Flat Cable Colour Grey with Red Stripe




## UL2651 FLAT RIBBON WIRE

File No.: E214500

Construction:

构造:

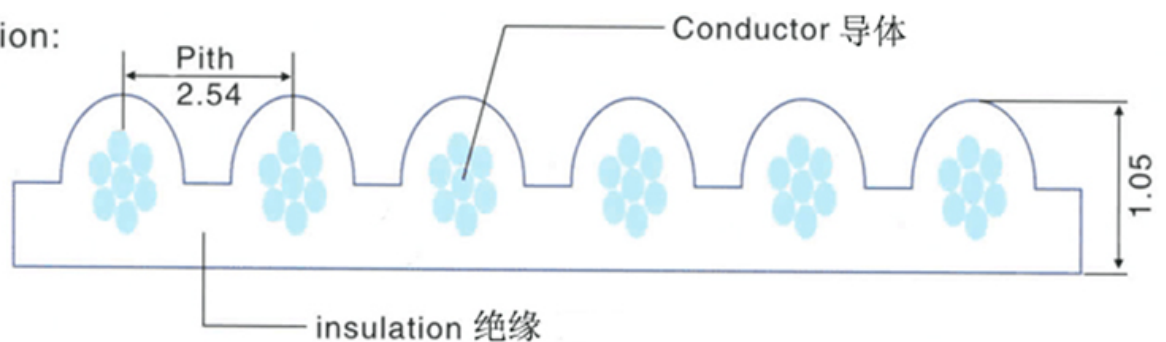

- Tinned, annealed, stranded or solid copper conductor, Top-coated.
- Rated temperature: 105°C.
- Rated voltage: 300Volts.
- Passes UL VW-1&CSA FT1 vertical flame test.

-- For use in internal wiring of appliances.

UL Style & CSA Type	AWG	Conductor Construction	Insulation Thickness	Overall Dimeter	Cores	Pitch	Conductor Resistance at 20°C					
		No/mm						mm	mm	NO	mm	Ω/KM
UL2651 ( Stranded)	26	7/0.16	0.23	1.05*16.00	8	2.00	150.00					
	26	7/0.16	0.23	1.05*20.00	10	2.00	150.00					
	26	7/0.16	0.23	1.05*24.00	12	2.00	150.00					
	26	7/0.16	0.23	1.05*28.00	14	2.00	150.00					
	26	7/0.16	0.23	1.05*32.00	16	2.00	150.00					
	26	7/0.16	0.23	1.05*36.00	18	2.00	150.00					
	26	7/0.16	0.23	1.05*40.00	20	2.00	150.00					
	26	7/0.16	0.23	1.05*44.00	22	2.00	150.00					
	26	7/0.16	0.23	1.05*48.00	24	2.00	150.00					
	26	7/0.16	0.23	1.05*60.00	30	2.00	150.00					
	26	7/0.16	0.23	1.05*64.00	32	2.00	150.00					
	26	7/0.16	0.23	1.05*20.32	8	2.54	150.00					
	26	7/0.16	0.23	1.05*25.40	10	2.54	150.00					
	26	7/0.16	0.23	1.05*30.48	12	2.54	150.00					
	26	7/0.16	0.23	1.05*35.56	14	2.54	150.00					
	26	7/0.16	0.23	1.05*40.64	16	2.54	150.00					
	26	7/0.16	0.23	1.05*45.72	18	2.54	150.00					
	26	7/0.16	0.23	1.05*50.80	20	2.54	150.00					
	26	7/0.16	0.23	1.05*55.88	22	2.54	150.00					
	26	7/0.16	0.23	1.05*60.96	24	2.54	150.00					
	26	7/0.16	0.23	1.05*76.20	30	2.54	150.00					
	26	7/0.16	0.23	1.05*81.28	32	2.54	150.00					
UL Style & CSA Type	AWG	Conductor Construction	Insulation Thickness	Overall Dimeter	Cores	Pitch	Conductor Resistance at 20°C					
		No/mm						mm	mm	NO	mm	Ω/KM
UL2651-1 ( Stranded)	28	7/0.127	0.23	0.9×11.43	9	1.27	239.00					
	28	7/0.127	0.23	0.9×12.70	10	1.27	239.00					
	28	7/0.127	0.23	0.9×17.78	14	1.27	239.00					
	28	7/0.127	0.23	0.9×19.05	15	1.27	239.00					
	28	7/0.127	0.23	0.9×20.32	16	1.27	239.00					
	28	7/0.127	0.23	0.9×25.40	20	1.27	239.00					
	28	7/0.127	0.23	0.9×31.75	25	1.27	239.00					
	28	7/0.127	0.23	0.9×33.02	26	1.27	239.00					
	28	7/0.127	0.23	0.9×38.10	30	1.27	239.00					
	28	7/0.127	0.23	0.9×43.18	34	1.27	239.00					
	28	7/0.127	0.23	0.9×45.72	36	1.27	239.00					
	28	7/0.127	0.23	0.9×50.80	40	1.27	239.00					
	28	7/0.127	0.23	0.9×63.50	50	1.27	239.00					
	28	7/0.127	0.23	0.9×76.20	60	1.27	239.00					

Product link :

---

<https://www.wenchangcable.com/ul2651-awg28-pvc-flat-cable-colour-grey-with-red-stripe.html>