

DATA SHEET

GENERAL PURPOSE CHIP RESISTORS

RC0805
5%, 1%
RoHS compliant



SCOPE

This specification describes RC0805 series chip resistors with lead-free terminations made by thick film process.

APPLICATIONS

- All general purpose application

FEATURES

- RoHS compliant
 - Products with lead free terminations meet RoHS requirements
 - Pb-glass contained in electrodes
 - Resistor element and glass are exempted by RoHS
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production
- Halogen Free Epoxy

ORDERING INFORMATION - GLOBAL PART NUMBER & I2NC

Both part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

YAGEO BRAND ordering code**GLOBAL PART NUMBER (PREFERRED)**

RC0805 **X R - XX XXXX L**
 (1) (2) (3) (4) (5) (6)

(1) TOLERANCE

F = $\pm 1\%$

J = $\pm 5\%$ (for Jumper ordering, use code of J)

(2) PACKAGING TYPE

R = Paper taping reel

(3) TEMPERATURE COEFFICIENT OF RESISTANCE

– = Base on spec

(4) TAPING REEL

07 = 7 inch dia. Reel

10 = 10 inch dia. Reel

13 = 13 inch dia. Reel

(5) RESISTANCE VALUE

There are 2~4 digits indicated the resistor value. Letter R/K/M is decimal point, no need to mention the last zero after R/K/M, e.g. 1K2, not 1K20.

Detailed resistance rules show in table of "Resistance rule of global part number".

(6) OPTIONAL CODE

L = optional symbol (Note)

Resistance rule of global part number	
Resistance code rule	Example
0R	0R = Jumper
XRXX (1 to 9.76 Ω)	1R = 1 Ω 1R5 = 1.5 Ω 9R76 = 9.76 Ω
XXRX (10 to 97.6 Ω)	10R = 10 Ω 97R6 = 97.6 Ω
XXXXR (100 to 976 Ω)	100R = 100 Ω
XKXX (1 to 9.76 K Ω)	1K = 1,000 Ω 9K76 = 9760 Ω
XMXX (1 to 9.76 M Ω)	1M = 1,000,000 Ω 9M76 = 9,760,000 Ω

ORDERING EXAMPLE

The ordering code of a RC0805 chip resistor, value 56 Ω with $\pm 1\%$ tolerance, supplied in 7-inch tape reel is: RC0805FR-0756R(L).

NOTE

1. All our RSMD products meet RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol printed and the optional "L" at the end of GLOBAL PART NUMBER / I2NC can be added (both are on customer request)

PHYCOMP BRAND ordering codes

Both GLOBAL PART NUMBER (preferred) and I2NC (traditional) codes are acceptable to order Phycomp brand products.

GLOBAL PART NUMBER (PREFERRED)

For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

I2NC CODE**2322 / 2350 XXX XXXXX L**

(1) (2) (3) (4)

TYPE/ 0805	START IN ⁽¹⁾	TOL. (%)	RESISTANCE RANGE	PAPER / PE TAPE ON REEL (units) ⁽²⁾		
				5,000	10,000/not preferred	20,000
RC11	2322	±5%	1 to 10 MΩ	730 61xxx	730 71xxx	730 81xxx
RC12	2322	±1%	1 to 10 MΩ	734 6xxxx	734 7xxxx	734 8xxxx
HRC11	2350	±5%	11 to 22 MΩ	521 10xxx	-	-
Jumper	2322	-	0 Ω	730 91002	730 91003	730 92002

(1) The resistors have a 12-digit ordering code starting with 2322 / 2350.

(2) The subsequent 4 or 5 digits indicate the resistor tolerance and packaging.

(3) The remaining 4 or 3 digits represent the resistance value with the last digit indicating the multiplier as shown in the table of "Last digit of I2NC".

(4) "L" is optional symbol ^(Note).

ORDERING EXAMPLE

The ordering code of a RC12 resistor, value 56 Ω with ±1% tolerance, supplied in tape of 5,000 units per reel is: 232273465609(L) or RC0805FR-0756R(L).

NOTE

1. All our RSMD products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol printed and the optional "L" at the end of GLOBAL PART NUMBER / I2NC can be added (both are on customer request)

Last digit of I2NC

Resistance decade ⁽³⁾ Last digit


0.01 to 0.0976 Ω	0
0.1 to 0.976 Ω	7
1 to 9.76 Ω	8
10 to 97.6 Ω	9
100 to 976 Ω	1
1 to 9.76 KΩ	2
10 to 97.6 KΩ	3
100 to 976 KΩ	4
1 to 9.76 MΩ	5
10 to 97.6 MΩ	6

Example:	0.02 Ω	=	0200 or 200
	0.3 Ω	=	3007 or 307
	1 Ω	=	1008 or 108
	33 KΩ	=	3303 or 333
	10 MΩ	=	1006 or 106

MARKING**RC0805**

E-24 series: 3 digits

First two digits for significant figure and 3rd digit for number of zeros



Both E-24 and E-96 series: 4 digits

First three digits for significant figure and 4th digit for number of zeros

For further marking information, please see special data sheet "Chip resistors marking".

CONSTRUCTION

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added on each end to make the contacts to the thick film resistive element. The composition of the resistive element is a noble metal imbedded into a glass and covered by a second glass to prevent environment influences. The resistor is laser trimmed to the rated resistance value. The resistor is covered with a protective epoxy coat, finally the two external terminations (matte tin on Ni-barrier) are added. See fig.3

DIMENSIONS

Table I	
TYPE	RC0805
L (mm)	2.00 $\pm$ 0.10
W (mm)	1.25 $\pm$ 0.10
H (mm)	0.50 $\pm$ 0.10
l ₁ (mm)	0.35 $\pm$ 0.20
l ₂ (mm)	0.35 $\pm$ 0.20

OUTLINES

For dimension see Table I

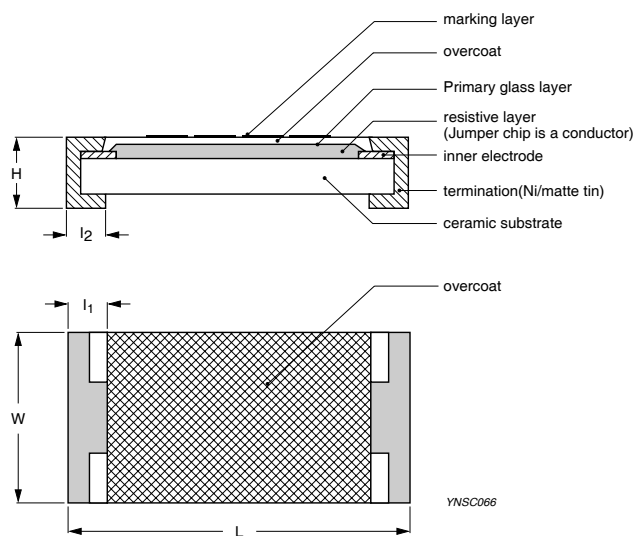


Fig. 3 Chip resistor outlines

ELECTRICAL CHARACTERISTICS

Table 2

CHARACTERISTICS	RC0805 1/8 W
Operating Temperature Range	-55 °C to +155 °C
Maximum Working Voltage	150 V
Maximum Overload Voltage	300 V
Dielectric Withstanding Voltage	300 V
Resistance Range	5% (E24) 1 Ω to 22 MΩ
	1% (E24/E96) 1 Ω to 10 MΩ
	Zero Ohm Jumper < 0.05 Ω
Temperature Coefficient	1 Ω ≤ R ≤ 10 Ω ±200 ppm/°C
	10 MΩ < R ≤ 22 MΩ ±200 ppm/°C
	10 Ω < R ≤ 10 MΩ ±100 ppm/°C
Jumper Criteria	Rated Current 2 A
	Maximum Current 5 A

FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please see the special data sheet “Chip resistors mounting”.

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

PRODUCT TYPE	PACKING STYLE	REEL DIMENSION	QUANTITY PER REEL
RC0805	Paper Taping Reel (R)	7" (178 mm)	5,000 units
		10" (254 mm)	10,000 units
		13" (330 mm)	20,000 units

NOTE

1. For paper tape and reel specification/dimensions, please see the special data sheet “Packing” document.

FUNCTIONAL DESCRIPTION**POWER RATING**

RC0805 rated power at 70°C is 1/8 W

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

or max. working voltage whichever is less

Where

V=Continuous rated DC or
AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value (Ω)

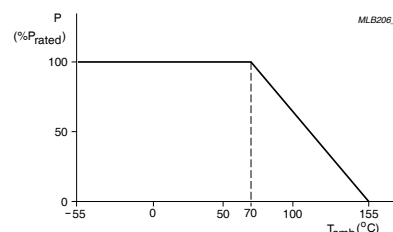


Fig. 4 Maximum dissipation (P) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

TESTS AND REQUIREMENTS**Table 4** Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Life/ Operational Life/ Endurance	MIL-STD-202G-method 108A	1,000 hours at 70±5 °C applied RCWV	±(2%+0.05 Ω)
	IEC 60115-1 4.25.1	1.5 hours on, 0.5 hour off, still air required	<100 mΩ for Jumper
	JIS C 5202-7.10		
High Temperature Exposure/ Endurance at upper category temperature	MIL-STD-202G-method 108A	1,000 hours at maximum operating temperature	±(1%+0.05 Ω)
	IEC 60115-1 4.25.3	depending on specification, unpowered	<50 mΩ for Jumper
	JIS C 5202-7.11	No direct impingement of forced air to the parts Tolerances: 125±3 °C	
Moisture Resistance	MIL-STD-202G-method 106F	Each temperature / humidity cycle is defined at 8	±(2%+0.05 Ω)
	IEC 60115-1 4.24.2	hours (method 106F), 3 cycles / 24 hours for 10d	<100 mΩ for Jumper
		with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts Measurement at 24±2 hours after test conclusion	
Thermal Shock	MIL-STD-202G-method 107G	-55/+125 °C	±(0.5%+0.05 Ω) for 10 KΩ to 10 MΩ
		Note: Number of cycles required is 300. Devices unmounted	±(1%+0.05 Ω) for others
		Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air – Air	<50 mΩ for Jumper
Short time overload	MIL-R-55342D-para 4.7.5	2.5 times RCWV or maximum overload voltage	±(2%+0.05 Ω)
	IEC60115-1 4.13	whichever is less for 5 sec at room temperature	<50 mΩ for Jumper No visible damage
Board Flex/ Bending	IEC60115-1 4.33	Device mounted on PCB test board as described,	±(1%+0.05 Ω)
		only 1 board bending required	<50 mΩ for Jumper
		3 mm bending Bending time: 60±5 seconds Ohmic value checked during bending	No visible damage

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability			
- Wetting	IPC/JEDECJ-STD-002B test B IEC 60068-2-58	Electrical Test not required Magnification 50X SMD conditions: 1 st step: method B, aging 4 hours at 155 °C dry heat 2 nd step: leadfree solder bath at 245±3 °C Dipping time: 3±0.5 seconds	Well tinned (≥95% covered) No visible damage
- Leaching	IPC/JEDECJ-STD-002B test D IEC 60068-2-58	Leadfree solder, 260 °C, 30 seconds immersion time	No visible damage
- Resistance to Soldering Heat	MIL-STD-202G-method 210F IEC 60068-2-58	Condition B, no pre-heat of samples Leadfree solder, 270 °C, 10 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	±(1%+0.05 Ω) <50 mΩ for Jumper No visible damage

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 3	Jul 15, 2008	-	- Change to dual brand datasheet that describe RC0805 with RoHS compliant - Description of "Halogen Free Epoxy" added - Define global part number
Version 2	Sep 03, 2004	-	- New datasheet for 0805 thick film 1% and 5% with lead-free terminations - Replace the 0805 part of pdf files: RC01_I1_21_31_5, RC02_I2_22_32_10, and HRC1_I_5_4 - Test method and procedure updated - PE tape added (paper tape will be replaced by PE tape) - High ohmic products combined into standard products.

“Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN.”



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	RC0805FR-0723K7
Ordering Code	232273462373
Unified CTC	RC0805FR-0723K7
Additional Product Code	9C08052A2372FKHFT
Description	General Purpose 0805 23,7 kOhm +-1% Paper 178mm (7")
Status	Standard
Series	General Purpose Chip Resistor
Size Code	0805 (2012)
Tolerance	±1%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	23.7 kOhm
Power Rating	1/8W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - General purpose chip resistors, RC0805 \(RoHS Compliant\) 5%, 1%; Rev.3 \[295 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)


[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	RC0805FR-07280K
Ordering Code	232273462804
Unified CTC	RC0805FR-07280K
Additional Product Code	9C08052A2803FKHFT
Description	General Purpose 0805 280 kOhm +-1% Paper 178mm (7")
Status	Standard

Series	General Purpose Chip Resistor
Size Code	0805 (2012)
Tolerance	±1%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	280 kOhm
Power Rating	1/8W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - General purpose chip resistors, RC0805 \(RoHS Compliant\) 5%, 1%; Rev.3 \[295 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)


[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	RC0805FR-073M3
Ordering Code	232273463305
Unified CTC	RC0805FR-073M3
Additional Product Code	9C08052A3304FKHFT
Description	General Purpose 0805 3,3 Mohm +-1% Paper 178mm (7")
Status	Preferred
Series	General Purpose Chip Resistor
Size Code	0805 (2012)
Tolerance	±1%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	3.3 MOhm
Power Rating	1/8W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - General purpose chip resistors, RC0805 \(RoHS Compliant\) 5%, 1%; Rev.3 \[295 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)


[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	AR0603JR-073R
Ordering Code	232270211308
Unified CTC	AR0603JR-073R
Additional Product Code	9C06031A3R00JGAFT
Description	NiAu 0603 3 Ohm +-5% Paper 178mm (7")
Status	Standard

Series	NiAu Termination Chip Resistor
Size Code	0603 (1608)
Tolerance	±5%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	3 Ohm
Power Rating	1/16W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - Chip resistors with Au-terminations, AR series 5%,1%; Rev.6 \[300 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)

[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)

[Springsite Technology](#)



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	RC0805FR-0769R8
Ordering Code	232273466989
Unified CTC	RC0805FR-0769R8
Additional Product Code	9C08052A69R8FKHFT
Description	General Purpose 0805 69,8 Ohm +-1% Paper 178mm (7")
Status	Standard
Series	General Purpose Chip Resistor
Size Code	0805 (2012)
Tolerance	±1%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	69.8 Ohm
Power Rating	1/8W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - General purpose chip resistors, RC0805 \(RoHS Compliant\) 5%, 1%; Rev.3 \[295 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)


[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)



[print-friendly version](#) 

Product Detail Information

Product Group	Resistor Chips
Ordering Code	RC0805FR-07845K
Ordering Code	232273468454
Unified CTC	RC0805FR-07845K
Additional Product Code	9C08052A8453FKHFT
Description	General Purpose 0805 845 kOhm +-1% Paper 178mm (7")
Status	Standard
Series	General Purpose Chip Resistor
Size Code	0805 (2012)
Tolerance	±1%
Packing Style	Paper Tape
TCR spec	Standard-TC
Reel size & Specialty	180 mm (7") Reel
Resistance	845 kOhm
Power Rating	1/8W

Related Data Sheets, Catalogs and Application Notes:

[Datasheet - General purpose chip resistors, RC0805 \(RoHS Compliant\) 5%, 1%; Rev.3 \[295 kb\]](#)

[Datasheet - Introduction thick film chip resistor, Rev.7 \[352 kb\]](#)

[Datasheet - Chip resistors mounting, Rev.5 \[335 kb\]](#)

[Datasheet - Chip resistors packing, Rev.6 \[212 kb\]](#)

[Datasheet - Chip resistors marking Rev.1 \[239 kb\]](#)

[Product Selection Guide 2008 \(revision 1\) \[3.65 MB\]](#)

[Yageo Passive Components 2008 \[3.26 mb\]](#)

[General info - Standard Values in a Decade \[8.39 kb\]](#)

[Appl. note - Low-ohmic & power chip resistors for power-control circuits \[394 kb\]](#)

[Ordering information for customers in North America \[8 kb\]](#)


[R-chip sample kits \[62 kb\]](#)

For optimal printing of Data sheets print from page 2 of the PDF.

Note Clear Text Codes in the data sheets can differ from the Clear Text Codes displayed above.

The CTC displayed above is a new code which has been introduced to align product codes in the complete Yageo organisation. You can search products with the CTC displayed in the data sheet by using the competitor part number search function.

Documents are in PDF format so to view and print them you will need [Adobe Acrobat Reader](#) installed on your computer. This is available free of charge.



Copyright © 2002-2005 Yageo Corporation

[Privacy Policy](#) | [Access to and use of this web site is subject to the following Terms of use](#)

Composition of The Clear Text Code (R-Chip)

Version: 17 01-21-02

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x

PHYCOMP Code

9C	Phycomp Thick Film Chip Res
9T	Phycomp Thin Film Chip Res

Size

0201	0201 (0603)	
0402	0402 (1005)	
0603	0603 (1608)	
0805	0805 (2012)	
1210	1210 (3225)	
1206	1206 (3216)	
1218	1218 (3248)	
2010	2010 (5025)	
2512	2512 (6432)	
4527	4527 (11070)	
AC34	0603 (1608) x 4 concave array	ARC241 / 242
AV34	0603 (1608) x 4 convex array	ARV241 / 242
AV22	0402 (1005) x 2 convex array	ARV321 / 322
AV24	0402 (1005) x 4 convex array	ARV341
AC24	0402 (1005) x 4 concave array	ARC341
AV28	0402 (1005) x 8 convex array	ARV381 / 382
RN31	10P8R in 1206 convex network	RNA310
RC21	10P4C4R in 1608 concave network	RCB210
FR01	1206 (3216) Fusible	
FR21	0603 (1608) Fusible	
SR01	1206 (3216) Surge	
VR01	1206 (3216) High Voltage 5%	
VR02	1206 (3216) High Voltage 1%	

Power Rating

1A	1/16W	0.063 W	0402	Upgraded from 1/16W
1A	1/10W	0.1 W	0603	
2A	1/8 W	0.125 W	0805	
3A	1/4 W	0.25 W	1206	
4A	1/10 W	0.1 W	0603	
5A	1/3W	0.3W	1210	
7A	1/20 W	0.05 W	0201	
8A	1/32 W	0.03125 W	RNA310	
12	1/2 W	0.5 W	2010	
1W	1 W	1 W	1218 / 2512	
2W	2 W	2 W		

Resistance Value

0R00	Jumper	6
R0xx	< 1R	0
Rxxx	< 1R	7
xRxx	1R - 9.76R	8
xxRx	10R - 97.6R	9
xxx0	100R - 976R	1
xxx1	1K - 9.76K	2
xxx2	10K - 97.6K	3
xxx3	100K - 976K	4
xxx4	1M - 9.76M	5
xxx5	10M - 97.6M	6
xxx6	100M+	7
Nxxx	marking code for RCB210	

Example:

Rchip 0603 (RC22H), 10R0, 1%, 5K reel =
9C06031A10R0FKHFT

R-chip Array

A = Array	
V = Convex	C = Concave
3 = 0603	2 = 0402
4 = 4 Res.	2 = 2 Res.

Packaging

T	5K Paper
3	10K Paper
4	20K Paper
5	4K Blister
6	5K Blister
7	50K Paper
P	25K Bulk Case

Special Coding

HF	PPCK, Sn/Pb
PF	100% Sn 2372
AF	NiAu

TCR

A	25 ppm/°C
B	50 ppm/°C
K	100 ppm/°C
L	200 ppm/°C
E	250 ppm/°C
M	300 ppm/°C
G	500 ppm/°C
P	750 ppm/°C
H	1000 ppm/°C
I	1500 ppm/°C
J	2000 ppm/°C
N	3000 ppm/°C

Tolerance

A	±0.05%
B	±0.1%
C	±0.25%
D	±0.5 %
F	±1%
G	±2%
J	±5%
N	0 / 20%
R	0 / 30%